





The bright side of mobile delight.

1.1. 1.1. 1.1.

205

102

Oplimum food presentation plays a central role in modern catering. Depending on the concept, occasion, time, and place, a mobile food service system has to tulfil a large variety of damands.

22

201

100

9.8

100 IN US

 244

By taking our BLANCO MIKADO buffet for and turning it into a complete food service system with cocled, heated, and ambient modules, we can meet all of your needs:

MIKADO combines technical perfection to the smallest detail with additudio shapes to build a line of highly individual products. BLANCO MIKADO modules are especially flexible and mobild. They fit in perfectly just about anywhere and are thus suitable for almost any kind of use. The modules are available with a slim or full-size substructure in 3 different sizes. fram 2 x GN 1/1 to 4 x GN 1/1

innovatio

These

Possible uses of BLANCO MIKADO:

hotels

restauranta

department store Cofocurios

stelf resteuranta

university datetenes and cancers

rest homes.

hospitals

motorway service areas

airport restaurants

-Irade fair and pany catering

Cold front

The ultimate in cool.



BLANCO MIKADO-SKS-4 with accessories

Potential uses:

- · breakfast bar
- dessert bar
- cake bar
- · dinner bar
- · midnight snack bar
- · salad bar
- · beverage bar

With BLANCO MIKADO-SK and BLANCO MIKADO-UK, you can present chilled food in a technically brilliant and optically elegant way. Our model UK with active convection cooling is parfect in every respect.

BLANCO MIKADO-SK — cold buffet bar with contact cooling

- · especially gentle cooling
- · excellent sanitary conditions
- easy and quick cleaning ^k
- cooling range from + 8 °C to +15 °C
 (The temperature is moseured at the well's grometric centre.)
- cooling well with sloped bottom for optimum draining of water during defresting

Module sizes and substructure variations

- 2, 3, and 4 x GN 1/1

 available with a slim or full-size substructure

Cold front

BLANCO MIKADO-UK --- cold buffet bar with active convection cooling

- high-performance cooling system with optimum cooling results
- cold air covers the food like a blanket, providing for an even temperature distribution
- conting range from +2 °C to +15 °C (The temperature is measured at the well's geometric centre.)
- optimum cleaning and hygiene through removable cooling well

Module sizes and substructure variations

+ 4 x GN 1/1

- full size substructure

--7.55 2 12 1 1 10 1 2 5 n 20 jn. 10 S B B B 1 H 10 10 STREET. 15 đ, 10 BLANCO MIKADO-UKM-4

with accessories

Heat miracle

Heating things up with perfect technology.

Our hul buildt bar BLANCO MIKADO-W is the ideal choice for keeping freshly prepared food warm under optimum conditions.

BLANCO MIKADO-W ---- hot buffet bar with bain-marte technology

- wells can be heated and controlled separately
- low energy requirement and quick preheating
- wells can be heated wet or dry.
- optimum safety due to protected ceramic radiators

Potential uses:

- breakfast bar
- lunch buffet
- dinner bar
- midnight snack bar



BLANCO MIKADO-WS-4 with accessories

Heat miracle



BLANCO MIKADO-WM-4 with accessories



BLANCO MIKADO-WS-2 with accessories

Module sizes and substructure variations

- 2, 3 and 4 x GN 1/1 with 2, 3 or 4 bain-marie wells
- available with a slim or tull-size substructure

All-rounder

Brilliantly universal.



BLANCO MIKADO-NM-4 with accessories

Potential uses:

- beverage counter
- cottee or tea bar
- bread or roll counter
- mucsli or fruit bar
- storage space for cutlory, glasses, crockery

Our ambient buffet bar BLANCO MIKADO-N optimally complements the cooled and heated buffets. It provides mough space for everything that does not have to be record or kept warm.

BLANCO MIKADO-N -- ambient buffet bar

- versatile use
- high quality tooks.
- sanilary, easy-to clean surface

Module sizes and substructure variations.

- 2, 3, and 4 x GN 1/1
- available with a slim or full size substructure

All-rounder



New faces wherever you look.

In our BLANCO MIKADO mediates, coolsteel and vibrant colours have formed an exoting fielson. Since it offers someany options of combining different colours and designs to create an individual atmrsphere, BLANCO MIKADO makes esting a true experience.

In this way, BLANCO MIKADO integrates itself harmoniously into the design integration of the BLANCO LAS VEGAS and BLANCO MANHATTAN food servery systems. The BLANCO MIKADO modules are available with or without a canopy and can be ordered with various rdifferent pacelings.

Canopy colours;

red and white stripes

blue and white stripes

· green and white stripes

· yollow and white stripes

For the underframe, the following designs are available:

staintess sicel (basic version).

steinless steel with equates in:

-red/blus/great/yellow

BLANCO MIKADO SKS-1

Basic module


Slim substructure

Full-size substructure

It's the details that count.



87 © 8 0 0



fold-down plate and iroy slides and side shelves for easy manoeuvring and anaximum flexibility

tray slides mounted beneath countertop for optimum hygiene

 Occurring temperature control with digital indicator mounted flush to surface for safe operation and excellent looks sheeze guard and sholf of tempered safety glass to sycia injunes and provice optimum safety

 countertop turned down in a 15 mm
 Gallus on long side for optimum hygiene and ergonomics

 canopy will Volcro fasteners for quick and easy mounting

Accessories / options:



 panelling of stainless steel with a beokground of real, bloc, green, or yollow

textile canopy in various different diskips (red and white, blue and white, green and white, or yellow and white stripes)

glass shelf of safely gloss with or without railing

lighting shelt of stainless stock with low voltage halogen lamps (for BLANCO MIKADO cold and ambient buffet bars)

lighting and heating shalf of stanless sloch with 250-watt paramic radiators (for BLANCO MIKADO hot buffet burs) fold-down tray slide of stainless sleet round tube or Resopal with stainless steet runners, colour, slone gray or polaris, for ousioner and / or operator side


fold down plate slide of Resopal, oblaus stand-groy or polaris, for oustomer and / or operator side

fold-down side shell of stainless stool round tube or Resopal, colour stone-grey or polaris, for right or left hand short side

electric condensation evaporator (for BLANCO MIKADO-UK only)


A REAL PROPERTY.

stainless steel castor set

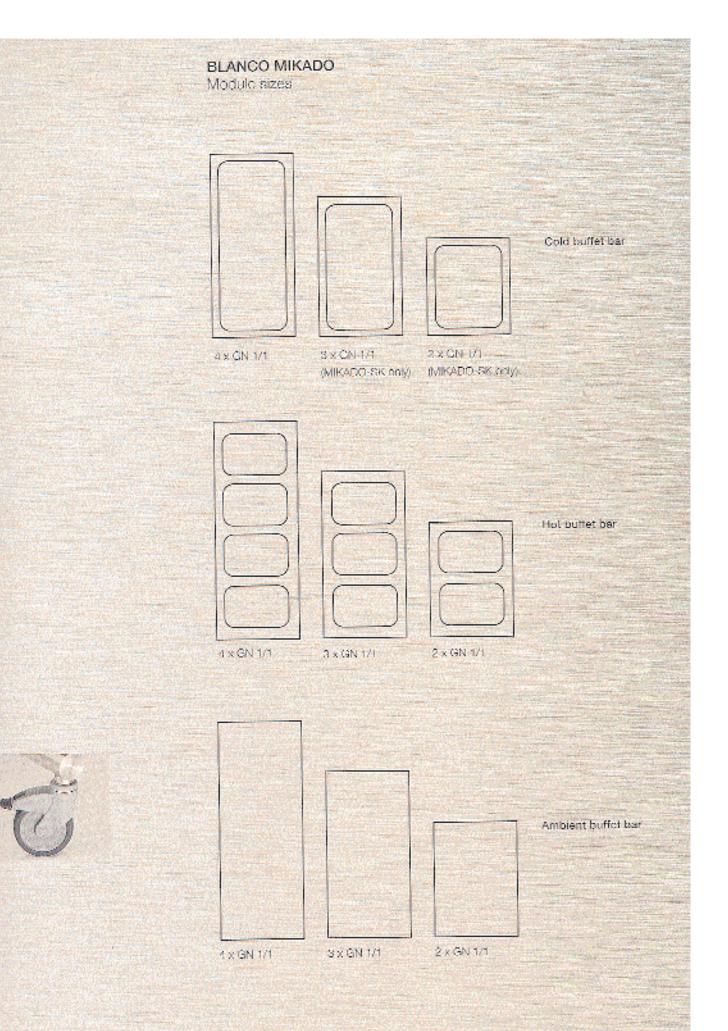

BLANCO MIKADO-SK Cold buffet bar with contact cooling

TECHNICAL DATA	4x1/1	3×1/1	2x1/1
Lengthun mm	1542	1217	8.85
Width in mm	875	675	675
Height in min-	1475	1475	1475
Height incl. canopy in mm	2300 -	2300	2300
Material	18/10 stainless steel	18/10 steinlass steel	18/10 stainless steel
Weight In kg	106	60	70
Capacity	4 x 69N-171-150	3 x GN 1/1-150	2 x GN 1/1-150
Pefrigerant	R 134a, GFC free	R 134a, BEC free	R 134a, CFC-free
Cooling system	gniloso Itatneo	contact certifing	contact cooling
Cooling range	>8 °C to +15 °C'	+8 °C to +15 °C"	+8 °C to +15 °C*
Cooling output	243 W at t ₀ = -10 °C	243 W at t _{il} = 10 °C	2431W ef t _o = -10 °C
Electrical connection	Schuka plug, 230 voli	Schuke plug, 230 volt	Schuke plug, 230 volt
Veltage / waitage	230V / 50Hz / 8.3kW	230V / 50Hz / 0.3kW	230V / 50Hz / 0.3kW
Lighting	Floorescent tubes (2x18W)	Fluorescent tubes (Px 18W)	Ekunnescent tubes (1x18W)
Order Number	- 563 939	• 572 124	• 572 125
	BLANCO MIKADO SKS 4	BLANCO MIKADO-SKS-3	BLANGO MIKADO-SKS-2
	• 572 128	- 572 127	+ 572-128
	BLANGO MIKADO-SKM-4	BLANCO MIKADO-SKM-3	BLANCO MIKADO SKM 2





DESORIPTION:

Mobile module with one-piece dooling well. Well with capting units on its outside and CP-C tree insulation, teamed, 1/2" bell-valve drain for cleaning or draining water after using crushed ice.

Crustertop of 18/10 stainless steel, height of edge: 50 mm, radius at lung sides: R = 15 mm, short sides turned down.

- Capanity: 4 x ISN_1/1 (art 3 or 2 x ISN_1/1) with a max, depite of 150 mm
- Retrigerant: P. 134a; CFC-free
- Operating module on long aids including on-off keys for equipment and lights, electronic temperature control with
- eligitel temperature display. The temperature is factory pre-set to 12~% and rars bound to values between +8 % end +15 %% .
- Ready to plug in, inst, helic stad that can be drawn out to a longth of 2 m. Schuke plug.
- 4 heavy-duty synthetic streaming casters with stainless steel bearings, 125 mm in diameter, 2 of them with brakes
- Two stanless steal round-tube stands on either side to support a curved, 6 mm Mick shoere grant of tempered satety glass that provides for optimum hygiene.
- The stanless shall ighting shelt is equipped with two Rourescent iotics (2x18W) (modules sizes 2xGN 1/1 only have one transscent tube, i.e. ix18W) that display the dishes in a friendly light and provide for optimum food presentation.
- Cooling well panelling: 18/10 stainless steet.

¹ The temperature is measured at the cooling well's generativit centre.

ACESSORIES / OPTIONS:

PANELLING:

Stainless steal with a background of gualed sheat metal in red (RAL 3020), blue (RAL 5508), graan (RAL 6824), or yellow (RAL 1921)

CANOPY:

instile canopy on stabiless step supports, removable Colours: ras and white, blue and white, grean and white, or yellow and white **Nimensions (LxW):**

BLANGR MIKANG-SIGS/-SRM-4: 1488 x 1258 mm BLANCO MIKABU SKS2-SKM-3: 1155 x 1250 mm BLANCO MIKADO-SKS/ SKM 2: 830 x 1250 mm.

GLASS SHELF:

Class shell of tempered safety glass with or without railing (natiling of stainless steel round tube). Dimensions w/o railing (La)Wallij: BLANOD MIKADO SKS/ SKM-4, 1410 x 270 x 8 mm BLANDO MIKADO-SKS/-SKM 3: 1685 x 276 x 8 mm. BLANCO MIKA009-SKS/-SKM-2: 180 x 270 x 8 mm

LIGHTING SHELF:

Stainless steel lighting shell with 4 (or 3 or 2) integrated low-vehage halogan tampa, 20 walts each. Dimensions (LxWxI):

HEANOR MIKABO-SKS/-SKM-4: 1448 x 80 x 40 mm. BLANCO MIKABO-SKS7-SKM-3: 1115 x 30 x 40 mm BLANCO MIKADO SKS/ SKM-2: 798 x 80 x 40 mm

TRAY SLIDE:

Fold-slown tray slide, stanlass steel round tabe, on operator anel/or customer sirie

Dimensions (Ex.W)

BLANGO MIKADO SKS/ SKM-4, 1953 x 235 cm, nunei tuive @ 25 cm - BLANCXI MIKADO-SKS/-SKM-2; 823 x 280 x 30 cm RUANGO MIXADO-SKS/ SKM 3: 1228 × 235 mm, round take 0: 25 mm BLANK/9 MIKA00-SKS/-SKSI-2: 968 x 245 mm, round tube at 25 mm - CASTORS:

Hole-down bay slide, Receipal pasted multiplex plate. colour: stone-grey, on operator and/or customer side. Binnensions & xWs(Hj):

BLANCO MIKADO-SKS/ SKM-4: 1553 x 280 x 30 mm REANOD MIXABO-SKS/-SKM 3: 1228 x 280 x 30 mm BLANCO MIKAIRI SKS/-SKM-2: 900 x 280 x 38 mm

Fold-down tray slide, Receptal contrad multiplex piste. solour: palaris, on operator ang/er pushemor arig Rimensions (ExWxH):

BLANDO MIKADO-SKS/ SKM 4: 1553 x 280 x 30 mm DLANRO MIRARO-SRS/-SRM-0: 1228 x 289 x 39 mm BLANOD MIKADO SKS/ SKM-2: 903 x 280 x 00 mm

PLATE SLIDE:

Fairi-down plate slide, Resopat geated multiplex glate. external share-grey, en eperator unit/or-customer side. Dimensions (LxV/x) (c

HEAND9 MRAD0-SKS/-SKM 4: 15570:153 x 30 mm BLAND® MIKA0/0-SKS/-SKM-0: 1228 x 153 x 90 mm BLANOB MIKABO SKS/ SKM-2: 800 x 150 x 30 mm

Fold down plate side, Record-costed multiplex plate, celeur: pielans, en operator anel/or custemer side Primensions (LxW/x) ():

ELANGH MIKANG-SKS7-SKM-4: 1553 x 263 x 36 mm BLANCO MIKABO SKS7-SKM-3: 1228 x 152 x 38 mm BLANGO MIKABO SKS/ SKM 2: 998 x 155 x 30 mm

SIDE SHELF:

Fold-slown side stept, stamless steel round tube, fur short sets Mimensions (LxW);:

BLANOR MIKARRI-SIGS-SIGH-1: 620 x 235 mm, milling tube 4: 25 mm BLANCO MIKADO SKSASKM-3, 523 x 235 mm, raund tube 6: 25 mm HEANOD MIKADO-SKSJ-SKM 2: #23 x 235 mm, reuschabe @: 25-ram

Fold-down side shait, Resogel-costed multiplex ptate, Opigur, stane-stev, for saint sing @imensions (Lx)VxHi: BLANCO MIRABO-SKS7-SKM-4: 828 x 289 x 39 mm BLANCO MIKADO SKS/ SKM-S (528), 280 x 30 rand

HLANG@ MIKADO-SKS/-SKM 2: 823 x 288 x 30 mm

Fold-down side shalf, Resopal-coated multiplex plate, colour: polaria, far shart side. Dimensions (LXWxH); BLANCO MIKABO SKS7-SKM-4; 823 x 200 x 30 mm FLANCO MIKADO-SKS/ SKM 3: 623 x 280 x 38 mm

Set of castera, stainless steel, dominier: 125 mm (5 carsions, 2 withow with broke);

MAKE:

Manufactume	BLANCO:	
Model:	ER ANORE MIKA995-SIX gold builtet bar.	
	with contact cooling	
Ørder No.:	569 838 - MIKADIO SIGS 4	
	572-128 - MIKADQ-SKM-4	
	572-124 MIKAR09-SKS-3	
	572 127 - MIKABØ SKM 3	
	572-125 - MIKADO-SKS-2	
	572-128 MIKA009-SK9-2	

BLANCO MIKADO-UK

Celd buffet bar with active convection ceeling

TECHNIGAL DATA	
Length in mm	1542
Width in men	675
Height in mm	1475
Fleight incl. canopy in mm	2300
Malerial	18/18 stainless steel
Weight in kg	190
Capacity	4 x GN 171 200
Refrigerant	R 134a, CFC-free
Cooling system	active convection cooling
Cooling range	+2 °C to +15 °C*
Cooling output	505 W at t ₀ =1-10°C
Electrical connection	Schuke plug, 230 vett
Voltage / wattage	230V/50Hz/0.6 kW
Lighting	Eluprescent tubes [2 x 18 W]
Order Number	569 940
	BLANCO MIKADO-UKM-1

DESCRIPTION:

Mobile module with folded, "box type" forcert-air cooling well with CFC-free insulation. Countertop of 18/18 steinless steel, height of edge: 50 mm, radius at long sides. R = 15 mm, short sides lumed down.

The dooling well can be taken out. The examinator beneath the well can be hitsd insward for cleaning. In the underframe of this model, a refrigerating unit, a deficit part, as well as an electrical connection brok are incated. BLANGO MIRANO with active convection cooling is suitable for food that needs to be kept at temperatures no higher than +7 °C for hygienic reasons.

- Capacity: 4 x GN 1/1, max. 200 mm deep, or op to cight salad bowls, 260 mm in clamater
- · Refrigerant: R. 134a, GEC free-
- Operating module on long side including un-off keys is equipment and lights, electronic temperature contini with sigital temperature display and automatic defrasting indicator. The temperature is factory pre-set to +7.1°C and can be set by values between +2.1°C and +15.4°C*.
- Ready to plug in, incl. helix conditions can be drawn on: to a length of 2 m, Sobulka plug
- 1 heavy-duty synthetic steering castors with stainkes steel bearage, 125 mm in diameter; 2 of them with brakes.
- Two stainless sters round tribe stands on either side to support a corved, 6 mm-thick sneeze guard of tempered safety glass that provides for optimum hygiene.
- The stainless steel lighting shell is equipped with two fluorescent tubes (2×18W) to display the dishes in a kiendly light and provide for optimum load presentation.
- Cooling well paneling: 18/10 stainless steel

"This temperature or measured at the costing well's geometric centre.



AGESSORIES / OPTIONS:

PANELUNG:

Stainless steel with a background of coated short metal in: red (RAL 3020), blue (RAL 5003), gricon (RAL 6024), or yothy (RAL 1021)

CANOPY:

Testile canopy on stainless steel supports, removable; colours: rod and white, blue and white, green and white, or yellow and white Dimensions (LxW): 1480 x 1250 mit

GLASS SHELF:

Glass shall of tempered safety glass with or without railing (railing of stainless steel round later) Bimonolons w/o railing (LXVXH): 1410 × 270 × 8 mm

LIGHTING SHELF:

Stainloss steel lighting shot with 4 integrated low voltage halogen lamps, with 4 x 2000 Bimensions (Lx/WxXI I): 1440 x 80 x 40 mm

TRAY SLIDE:

Fold-driwn tray slide, stainless steel round tute, on operator and/or oustomer side

Dimensions (LxW): 1553 x 235 mm, cound tube diameter: 25 mm

Fold-down tray slide, Hesopel-coated multiplex plate, colour: stone-grey, on operator and/or costomer side (Imensions (LXW XxH): 1553 x 290 x 30 mm)

Fold-down tray slide. Recepct nosted multiplex plats, colour: polaris, on operator and/or costomer side Dimensions (LxWxxH): 1553 × 280 x 39 mm

PLATE SLIDE:

Fold-down plate slide, Resopat coeted multiplex plate, colour, stone-gray, on operator and/or customer side Dimensions (LXWX1): 1568 × 153 × 30 mm

Fold down plate sinks, Rosopal-coated multiplex plate, colour: polarts, on operator and/or customer side Dimensions (LxW/xH): 1553 x 150 x 38 mm

SIDE SHELF:

Finit down side shelf, stainless steel round tube, for shart side Dimensions (FxW): 623 x 235 mm Round tube diameter: 25 mm

Fold-down side shelf. Resound costed multiplex plate, onlour, stone-groy, for short side Dimensions (LxWxH): 623 x 280 x 30 mm

Fold down side shell, Rosopal-opated multiplex plate, colour: polans, for short side Dimensions (LxWxH): R25 x 280 x 30 mm

CASTORS:

Set of pastors, stainless steel, diameter: 125 mm (4 castors, 2 of them with brake)

RI ANO®

MAKE:

Manufacturer:	
Model:	
Onter No.:	

BLANKRI MIKADO-UK cold buffet bar with autive convection easiing 688 949 - MIKADO-UKM-4

BLANCO MIKADO-W

Hot buffet bar with bain-marie technology

TECHNICAL DATA	4x1/1	3x1/1	2x1/1
Length in nun	1542	1217	892
Wedth in mm	- 672	675	675
Height in mits	1475	1475	1476
Reight incl. canopy in mm	2500	2300	2300
Material	18/10 stainless steel	18/10 stainless steel	18/10 stainless steel
Weight in kg	IDE .	84	63
Capacity	4x GN 1/1-200	3xGN 171-200	2xGN 1/1 200
No. of bain marie wells	4.0	3	2
Temperature range	+30°C to +95°C	T30 °C to 195 °C	+ 30 °C to + 95 °C
Hectrical connection	Schulte plug, 230 volt	Schuke plug, 230 velt	Schuke plug, 230 volt
Voltage / wattage	230V/50Hz/3.33kW	230V/5011z/2.75KW	230V/50Hz/1.58kW
Lighting	Low voltage halegan lamps	Low-voltage halogen lamps	Low-voltage halogen lamps
	(4 × 20 W)	(3 x 20 W)	(2 x 20 W)
Basting	Geramic radiators	Ceramic radiators	Ceramic radiators
	(3×150W)	(2x150W)	(1x160W)
Order Number	• 572 129	•572 130	• 572 131
	BLANCO MIKADO WS 4	BLANCO MIKADO WS 3	BLANCO MIKA900-WS-2
	• 572 132	•572 133	•572 134
	BLANCO MIKADO WM 4	BLANCO MIKABO WM 3	BLANCO MIKADO-WM-2



DESCRIPTION:

Mobile module with 4 (or 3 or 2) bein-marie wells, welded in without joints, far GN containers size GN 1/1 200 or their subdivisions. The bein-marie wells are heated indirectly wet or dry, 0.7 kW per well, and are equipped with a drain. Counterting of 18/10 stainless sheet, height of edge: 50 mm, radius at long sides: R = 15 mm, short sides turned down.

+Capacity: 4xGN 1/1 (or 3 or 2 x GN 1/1) with a max. depth ef 200 mm

 Operating module init long side including on-off keys for equipment, lights, and infrared larges, electronic temperature control with digital temperature display. The temperature can be adjusted continuously between ±30 °C and ±85 °C. The wells can be selected, controlled

- and switched on and off Separately.
- Ready to plug in, ingl. helix cord diat can be drawn out to a length of 2 m, Schuko plug
- 4 keavy-duty synthetic steering castors with stainless steel bearings, 125 mm in diameter, 2 of them with brakes
- Two steinless steel round-tube stands on either side to support a curved, 6 mm thick sneare guard of tempered safety glass that provides for optimum hygiene
- The stathless shell shell for lighting and heating, which is equipped with 4 (or 3 or 2) low-voltage halogen tamps, 20W each, and 3 (or 2 or 1) ceramic radiators, 150W each, shows the dishes in a friendly light and provides for optimum food presentation.
 Panalling: 18/10 stathless steel



ACESSORIES / OPTIONS:

PANELLING:

Siminess steel with a trackground of coated should matel in red (RAL 30240, blue (RAL 5000), green (RAL 6024), or yollow (RAL 1021)

CANOPY:

TextTe canopy us plainloss steel supports, removable Culours: rad and white, blue and white, green and white; or yallow and white Isimonalons (ExM);

BLANCO MIKADO-WS/-WM-4: 1468 x 1250 mm HI ANOD MIKADO-WS/-WM-3: 1155 x 1258 mm BLANCO MIKADO-WS/-WM 2: 930 x 1250 mm

GLASS SHELF: -...

Glass shall at tempered salely glass with or without railing (rating of steinless steel round tube) Mimensions w/u railing (LXVXH)

BLANCO MIKADO-WS/-WM-4: 1410 x 270 x 8 mm BLANCO MIKADO WS/-WM-3: 1605 x 270 x 8 mm BLANCO MIKADO-WS/-WM 2: 768 x 276 x 8 mm

HEATING AND LIGHTING SHELF;

Stainless steel lighting shelf with 4 (or 3 or 2) integrated low voltage helogen temps, 20 W each, and 3 (or 2 or 1) integrated ceramic radiators, 256 W each

Binensions (ExVi)(H);

BLANCO MIKADO WS/-WM-1: 1440 x 114 x 40 mm BLANCO MIKADO-WS/-WM 8: 1115 x 113 x 40 mm BLANCO MIKADO-WS/-WM-2: 299 x 114 x 40 mm

TRAY SLIDE:

Fold-down irray shele, stainless skeel mund tube, on operator and/an customer side

Dimensions (ExVi),

HUANGO MIKADO WKY WM-1: 1553 x 235 mm, round tube 2: 25 mm BLANCXI MIKADO-WS/AWM 3: 1228 x 235 mm, round tube 0: 25 mm BLANCO MIKADO-WS/AWM-2: 903 x 237 mm, round tube 0: 25 mm

Fold-stown tray slide, Resultation multiplet, plate, walnut: stonegrey, on operator and/or customer side

Mmanskona (L.x.Vif.x.L.(); ----

ELANCO MIKADO WS/-WM-4: 1558 x 280 x 30 mm ELANCO MIKADO WS/-WM-5: 1220 x 280 x 30 mm RI ANCO MIKADO-WS/ WM 2: 905 x 260 x 30 mm

Hole-down (ray slick, Honopel-coated multiplex plate, cultur: philods, on operator and/or customer side --l/imensions (Lx W x H):

RI ANCO MIKADO-WS/ WM-4: 1553 x 290 x 30 mm BLANCO MIKADO-WS/-WM-3: 1228 x 280 x 30 mm BLANCO MIKADO WS/-WM-2: 903 x 200 x 30 mm

PLATE SLIDE:

Fold down plate side, Resonal control initialies plate colour: storm gray, on operator and/or customer sige formersions (LAWXII): BLANCO MIKABO-WS/-WM-4: 1658 × 153 × 30 mm BLANCO MIK/vall WS/-WM-3; 1220 × 153 × 30 mm BLANCO MIK/vall WS/-WM-3; 1220 × 153 × 30 mm

Fold-down plate sinte, Hewpel-ocated multiplick plate, colour: polaris, on operator constance side Dimensions () xWixH). HI ANCO MIKABO-WG/ XWM 41 1663.0:153 x 30 mm BLANCO MIKABO-WG/ XWM-21 1098 x 163 x 30 mm HI ANCO MIKABO WS/ WM-22 800 x 153 x 30 mm

SIDE SHELF:

Hold-down side shalf, stainless steel round who, for short side Dimensions (LXW):

BLANDO MIKAWH WS/-WM-1: 823 x 235 mm, round tube 6: 25 mm, HI ANCXI MIKABO-WS/ WM 3: 625 x 235 mm, round tube/6: 25 mm, BLANCXI MIKABO-WS/-WM-2: 525 x 255 mm, round tube/6: 25 mm;

Fairt down alde shelf, Rosapat gogted multiplex plans colour: stone grey, for short side (filmensions [LX954]); DL/MC8 MIKADO-AVS/-WM 4: 623 x 280 x 30 mm BLANC8 MIKADO WS/-WM-3: 623 x 280 x 30 mm HLAN86 MIKADO WS/ WM-7: 623 x 200 x 36 mm

Fold-down side shoit, Heeopel-coelest multiplex-plate, colour: polerie, for short side Dimensions () xWxH): HI ANCO MIKADO WSAWM-4: 623 x 2008 x Heijmm

BLANCH MIKADO-WSAWM 3: 623 x 250 x 30 mm BLANCO MIKANG-WSAWM-2: 623 x3/40 x 30 mm

CASIOHS:


Stainless steel cantor a	et, Heritaria	
costor diameter: 125 m	Im (4 castora,	2 of them with botkes

MAKE:	
Manufacturer:	BLANCO -
Medel:	BLANCO MIKAR® What buffel ba
	with bain-marie technology
Greder Mate	572 128 MIKAIND-005-4
	572 132 - MIKADO 1084-4
	572 130 MIKADO-WS-3
	572 133 - MIKABO-WM-S
	6.22.131 - MINABO-WG 2
	572 134 MIKA00-40%-2

BLANCO MIKADO-N Ambient buttet bar

TECHNICAL DATA	4x1/1	3x1/1 .	2×1/1
Length in mm	1542	1217	892
Width is mm	675	675	675
Height in mon	1018	1018	1018
Height incl. canapy in mm	2200	2300	2300
Material	16/18 stainless steel	18/10 stainless steel	18/10 stainless steel
Weight in kg	73	57	41
Capacity	corresponds to 4x GN 1/1	corresponds to 3x GN 1/1	corresponds to 2x GN 1/
Order Number	· 572 135	•572 138	·572 137
	BLANGD MIKADO NS 4	BLANCO MIKA00 NS 3	BLANCO MIKABO NS 2
	• 572.138	·572 139	+572 140
	BLANCO MIKADO NM 4	BLANCO MIKADO NM 3	BLANCO MIKADO NM 3





DESCRIPTION:

Moisile module with countertop of 18/10 stainless steel, height of edge: 50 mm, radius at long sides: R = 15 mm, short sides turned down.

- -Size: corresponding to $4 \times$ CN 1/1 (or 3 or 2 \times CN 1/1)
- Control panel on long side including lights on-off switch (rucker switch)
- 4 heavy-duty synthetic steering castors with stainless steel bearings.
 125 room in character, 2 of them with brakes
- Two stainless steel round tube stands on either side, height above counterings: 198 nm, to accept senapy and/or snappe guard construction including lighting shell (if desired)
- Panelling: 18/10 stainless steel

ACESSORIES / OP HONS:

PANELLING:

Stainless steel with a trackground of coated sheet metal inc red (RAL 3020), blue (RAL 5003), groom (RAL 5002), nr yrsiaw (RAL 5001) ---

CANOPY:

Textile canopy on stainless steel supports, removable Colours: red and white, blue and white, green and white, or yellow and white

Dimensions (LxW):

BLANCO MIKADO NS/ NM 4: 1488 x 1258 mm BLANCO MIKADO-ND/-NM-3: 1155 x 1250 mm

mm 0251 x 028 - 2-MM-32/-MRAIM 00/MAIH

SNEEZE GUARD WITH NEON-TUBE LIGHTING SHELF:

two stainless steel round tube stands on either side support a curved, 6 mm thick sheeze goard of temporal satety glass that provides for optimum hygican. The stainless steel lighting shell is equipped with two fluorescent tubes ($P \times 18W$) (modules size $2 \times GN1/1$ only one tuberscent tube, i.e. $1 \times 18W$) that display the closes in a triandly light and provide for optimum food presentation. Dimensions ($1 \times W \times 1$):

BLANCO MIKADO NS/-NM-4, 1440 x 80 x 40 mm BLANCO MIKADO-NS/-NM 3: 11 IS x 80 x 40 mm BLANCO MIKADO-NS/-NM-2: 790 x 80 x 40 mm

SNEEZE GUARD WITH HALOGEN LIGHTING SHELF:

Two stainless stort mund tube stands on either side support e narvari, 6 mm-thick sneeze grant of tempered safety glass that provides for optimum hygiene. The stainless steel lighting shelf, which is equipped with 4 (or 3 or 2) integrated low voltage halogan tamps. 20W each, shows the distres in a triendly light and provides for optimum front presentation.

Rimensions (LxW/xXI):

BLANCO MIKADO-NS/-NM-4: 1140 x 80 x 40 mm BLANCO MIKADO-NS/-NM-8: 1115 x 80 x 40 mm BLANCO MIKADO-NS/-NM-2: - /30 x 80 x 40 mm

GLASS SHELF:

Glass shoft of tempered safety glass with in without railing (failing of stainless stoct round tube) (famonalons w/o railing (LxWxXI I): BLANGO MIKADO MS/ NM-4: 1410 x 270 x 8 mm BLANGO MIKADO-NS/-NM 3: 1985 x 270 x 8 mm BLANGO MIKADO-NS/-NM-2: 780 x 270 x 8 mm

TRAY SUDE:

Fold-down tray slide, steinless steel round tubo, on operator and/or customor side Dimensions (LXV0:

BLANCO MIKADO NSA-NM-4: 1553 x 235 mm, round tube @ 25 mm BLANCO MIKADO-NSA-NM-3: 1228 x 235 mm, round tube @: 25 mm BLANCO MIKADO-NSA-NM-2: 900 x 235 mm, round tube @: 25 mm.

Fold down tray slide, Resuper-context multiplex plate, colour: stone gray, on operator and/or customer rate. Rimensions (LxWxt ():

BLWIGO MIKANO-NSA-NM-4: 1558 x 280 x 30 mm RUANOO MIKADO-NSA NM-3: 1228 x 280 x 30 mm BLANCO MIKADO-NSA-NM-2: 308 x 280 x 30 mm

Fold-down tray slide, Receptol coated multiplex plate, wrktur: polaris, on operator and/or customor side Dimensions (LxtWoott):

HLANGO MIKADO-NS/-NM-4: 1558 x 250 x 30 mm BLANGO MIKADO-NS/-NM-3: 1226 x 250 x 30 mm 'HLANGO MIKADO-NS/-NM 2: 905 x 250 x 30 mm

PLATE SLIDE:

Fold-duwn plate sinte, Hasopal-coefed multiplex plate, colour: stone-grey, on operator and/or cristomer side. Dimensions (LKWxH):

HLANGO MIKADO-NS/ NM 4: 155 x 153 x 30 mm BLANGO MIKADO-NS/-NM-3: 1220 x 153 x 30 mm BLANGO MIKADO-NS/-NM 2: 905 x 153 x 30 mm

Fold-down plate slide. Resogel-coated multiplex plate...... nelour: polerie, un operator and/or costemer side Dimensions (LXW/xX)-();

BLANCO MIKADO NS/-NM-4 1553 x 153 x 30 mm BLANCO MIKADO-NS/-NM-3: 1298 x 153 x 30 mm BLANCO MIKADO NS/-NM-2: 803 x 153 x 30 mm

SIDE SHELF:

Fold-down side short, stainless steel round tabe, for short side timensions $(L_{\rm A} W)_{\rm C}$

DLANGG MIKABB-NS/-NM-1: \$23 x 235 mm, round tube (0: 25 mm, SLANGO MIKADO NS/-NM-3: \$23 x 235 mm, round tube (0: 25 mm) BLANGO MIKADO-NS/-NM-2: \$23 x 235 mm, round tube (0: 25 mm)

Enid-down side sheff, Record chated multiplex plate, colour: stone grey, for short side Pimensions (LxWxH): BLANDO MIKABO-NS/-NM-4: 628 x 280 x 30 mm

BLANGO MIKABID-NS/-NM-3: 620 x 280 x 30 mm BLANGO MIKADO NS/ NM 2: 623 x 280 x 30 mm

Fold-down side shaft, Hrsopel-coated multiplex plate, colour: poleris, for shart side Dimensions (LXWXXH); HI ANCO MIKADO-NS/ NM 4: 693 × 260 × 30 mm BLANCO MIKADO-NS/-NM-2; 623 × 260 × 30 mm

BLANCO MIKABO NSANM-2: 620 x 280 x 30 mm

CASTORS:

Set of castors, staintess stast, diameter: 125 mm (4 castors, 2 of them with brake)

MAKE:

Order No.:

Manufanturer: Model:

BLANGO

BLANCO MIKADO N ambient buffet kar. 572 135 MIKADO-NS-4 572 138 - MIKADO-NS-4 572 138 - MIKADO-NS-3 572 139 - MIKADO-NS-3 572 139 - MIKADO-NS-2 572 140 MIKADO-NM-2