

## **Cold front**

The ultimate in cool.



BLANCO MIKADO-SKS-4 with accessories

## Potential uses:

- · breakfast bar
- dessert bar
- dake bar
- · dinner bar
- · midnight snack bar
- · salad bar
- · beverage bar

With BLANCO MIKADO-SK and BLANCO MIKADO-UK, you can present chilled food in a technically brilliant and optically elegant way. Our model UK with active convection cooling is perfect in every respect.

BLANCO MIKADO-SK — cold buffet bar with contact cooling

- · especially gentle cooling
- excellent sanitary conditions
- easy and quick cleaning
- cooling range from +8 °C to +15 °C
   (The temperature is measured at the wells geometric centre.)
- cooling well with sloped bottom for optimum draining of water during defresting

Module sizes and substructure variations

- 2, 3, and 4 x GN 1/1
- available with a slim or full-size substructure

## **Cold front**

BLANCO MIKADO-UK — cold buffet bar with active convection cooling

- high-performance cooling system with optimum cooling results
- cold air covers the food like a blanket, providing for an even temperature distribution
- conling range from +2°C to +15°C.
   (The temperature is measured at the well's geometric centre.)
- optimum cleaning and hygiene through removable cooling wall

Module sizes and substructure variations

- 4 x GN 1/1
- · full size substructure



BLANCO MIKADO-UKM-4 with accessories

## **Heat miracle**

## Heating things up with perfect technology.

Our hot buffet bar BLANCO MIKADO-W is the ideal choice for keeping Irreshly prepared food warm under optimum conditions.

BI ANCO MIKADO-W — hot buffet bar with bain-marie technology

- wells can be heafed and controlled separately
- low energy requirement and quick preheating
- · wells can be heated wet or dry
- optimum safety due to protected ceramic radiators

## Potential uses:

- · broakfast bar
- lunch buffet
- dinner bar
- · midnight snack bar



BLANCO MIKADO-WS-4 with accessories

# **Heat miracle**



BLANCO MIKADO-WM-4 with accessories



BLANCO MIKADO-WS-2 with accessiving

## Module sizes and substructure variations

- 2, 3 and 4 x GN 1/1 with 2, 3 or 4.
   bain-marie wells
- available with a slim or tull-size substructure

## **All-rounder**



BLANCO MIKADO-NM-4 with accessories

## Potential uses:

- beverage counter
- cottee or tea bar
- bread or roll counter
- mucsli or fruit bar
- storage space for cuttory, glasses, crockery

## Brilliantly universal.

Our ambient buffet bar BLANCO MIKADO-N optimally complements the cooled and heated buffels. If provides enough space for everything that does not have to be excluded or kept warm.

## BLANCO MIKADO N - ambient buffet bar

- versatite use
- bigh quality tooks
- · sanitary, easy-to clean surface

× .


## Module sizes and substructure variations

- 2, 3, and 4 x GN 1/1
  - available with a slim or full size substructure

)

# **All-rounder**



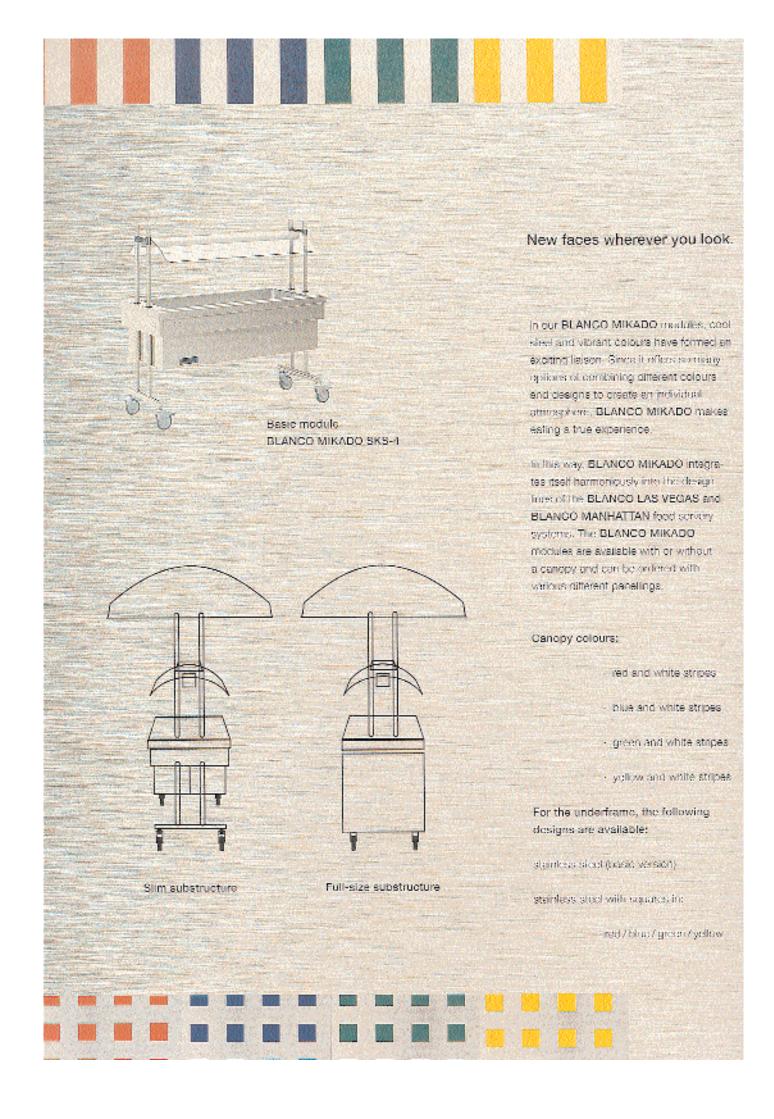

## It's the details that count.



- continuously "microlised" surface for optimum hyglene and elegant looks
- rold-down plate and fray slides and side shelves for easy mandeuvring and anximum flexibility
- tray slides mounted beneath countertop for optimum hygiene
- digital indicator injunicd flush to surface for safe operation and excellent looks

- sheeze guard and sholf of tempered safety glass to sycia injuries and provide optimum safety
- countertop turned down in a 15 mm
  -failur, on long side for optimum hygiene,
  and ergonomics
- canopy will Volcro fasteners for quick and easy mounting






# BLANCO MIKADO


Modulo sizes

4 x GN 1/1

3 x GN 1/1

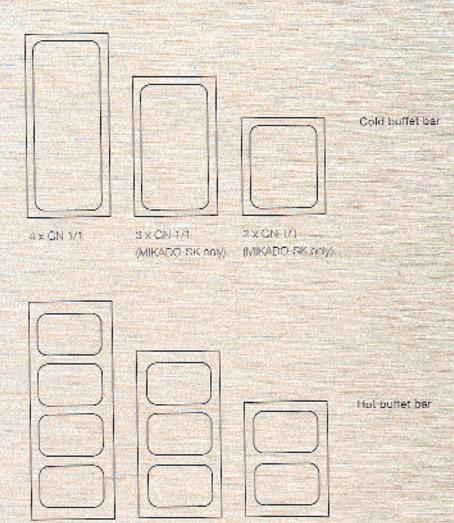



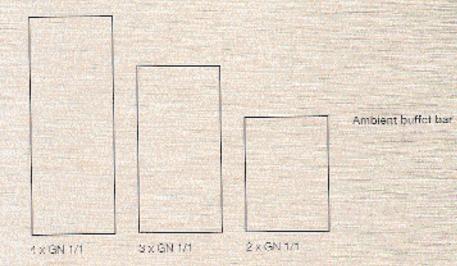

2 x GN 1/1

## BLANCO MIKADO-SK Cold buffet bar with contact cooling

TECHNICAL DATA	4x1/1	3x1/1	2x1/1 ; ;
Lengthun mm	1542	1217	892
Width in mm	8/5	675	
			675
Height in min.	1475	1475	1475
Height incl. sanapy in mm	2300 -	2300	2300
Material	18/16 staintess steel	18/16 steinlass steel	18/10 stainless steel
Waight In kg	106	68	70
Capacity	4 x GN 17 F-150	3 x GN 1/1-150	2 x GN 1/1-150
Refrigerant	R 134a, GFC free	R 134a, ISEC free	R 134s, CFC-free
Conling system	centact cooling	contact ceoling	contact cooling
Cooling range	>8 °C to +15 °C'	+8 °C to +15 °C"	+8 °C to +15 °C'
Cooling output	243 W at t <sub>0</sub> = -10 °C	243 W at t <sub>H</sub> = 10 °C	243 W et t <sub>o</sub> = -10 °C
Electrical connection	Schuke plug, 238 volt	Schuke plug, 230 volt	Schuke plug, 230 volt
Veltage / waitage	236V / 50Hz / U.3kW	230V / 50Hz / 0.3kW	230V / 50Hz / 0.3kW
Lighting	Fluorescent Lubes (2 x 18 W)	Fluorescent tubes (Fx 18W)	Fluorescent tubes (Tx18W)
Order Number	- 560 939	•572 124	• 572 125
	BLANCO MIKADO SKS 4	BLANCO MIKARO-SKS-3	BLANGO MIKADO-SKS-2
	•572 128	-572 127	- 572 128
	BLANGG MIKADO-SKM-4	BLANCO MIKADO-SKM-3	BLANCO MIKADO SKM 2





## DESCRIPTION:

Mobile module with one-piece cooling well. Well with cooling units on its outside and 1240 tree insulation, teamed, 172" bell-valve drain for oleaning or draining water after using crushed ice.

Countartop of 18/10 stainless steet, height of edge:  $50 \, \mathrm{mm}$ , radius at lung sides:  $R = 15 \, \mathrm{mm}$ , short sides turned down.

- Capanty: 4 x (§N 171 (ac. 3 or 2 x (§N 171))
   with a max, depth of 150 mm
- Retrigerant: Fl 134a; CFC-free
- Operating module on long sids including on-off keys for equipment and lights, electronic temperature control with alightst temperature display. The temperature is factory pre-set to :7 °C and can be set to values between +8 °C and +15 °C'.
- Ready to plug in, incl. helic condities can be drawn and to a length of 2 m. Schuke plug.
- 4 heavy duty synthetic stranning casters with stainless steel bearings, 125 mm in diameter, 2 of them with brakes
- Two stantess steel round-tube stends on either side to support a curvest, 6 mm Blick snooze grant of tempered safety glass that provides for optimum hygiene
- The staniess sheal lighting shelf is equipped with two fluorescent, tubes (2x18W) (modules sizes 2xGN 1/1 only have one fluorescent tube, i.e. ix18W) that display the dishes in a friendly light and provide for optimize toest prescritation.
- · Cooling well gamelling: 18/10 stailless steet

<sup>\*</sup> The temperature is measured at the poeting wells, permainic people.

## ACESSORIES / OPTIONS:

#### PANELLING:

Stainless steat with a background of goaled sheat metal in red (RAL 3020), blue (RAL 590%), graen (BAL 6824), or yellow (BAL 1921).

#### CANOPY:

lextile canopy on stainless sted supports, removable Colours: red and white, blue and white, green and white, or yellow and white

Dimensions (LxW):

BLANGR MIKARG-SKS/-SRM-d: 1488 x 1258 mm. BLANCO MIKABO SKS7-SKM-3; 1155 x 1250 mm. BLANCO MIKADO-SKS/-SKM 2: 830 x 1250 mm.

#### GLASS SHELLS:

Class shelf of temporard safety glass with or without railing (natting of stainless steel round tutin).

Dimensions w/o railing (Lx)WxHij:

BLANOS MIKADO SKS/ SKM-4, 1410 x 270 x 8 mm. HLANCO MIKADO-SKS/-SXM 3: 1685 x 276 x 8 mm. BLANCO MIKAI00-SKS/-SKM-2: 780 x 270 x 8 mm

#### LIGHTING SHELF:

Staintess steel lighting shelf with 4 (or 3 or 2) integrated low-vollage halogen lamps, 20 walts each:

Pimensions (LxWxI 0:

HEANCIR MIKABO-SKS/-SKM-4: 144H x R0 x 40 mm. BLANCO MIKARD-SKSESKM-3: 1115 x 80 x 40 mm. BLANCO MIKABO SKS/ SKM-2: 790 x 80 x 40 mm;

### TRAY SHIBE:

Fold-slown tray slide, stamless afeel round tube, on operator anellor. sustamer sirie.

Binerizanas (LxW):

BLANGO MKADO SKSZ SKM-4, 1953 x 205 mm, round tube & 25 mm — BLANGO MKADO-SKSZ-SKM-2; 823 x 280 x 30 mm. BLANGG MKADG-SKS/ SKM 3: 1228 x 236 mm, round tube @: 25 mm. BLANDO MIKADO-SKSASIO-F2: 960 x 2/45 mm, round tube at 25 mm. - CASTORS:

Holef-down tray slide, Resupat coated multiplex plate. exister: stone-grey, on operator anal/or customer side. Bit rensions & xWxHi;:

BLANCO MIKADO-SKS/ SKM-4: 1553 x 280 x 30 mm RLANGO MIKABO-SKS/-SKM 3: 1228 x 280 x 30 mm BLANCO MIKARRI SKS/-SKM-2: 900 x 280 x 30 mm.

Fold-down tray slide, Resupul coated multiplex piste. solous palaris, on agerstor and/er pustemor aris-Dimensions (ExWxH):

BLANDO MIKADO-SKS/ SKM 4: 1513 x 280 x 30 mm DLANDO MIKARO-SKS/-SKM-0: 1228 x 280 x 36 mm BLANOD MIKADO 5KS/ 5KM-2; 903 x 280 x 38/mm

#### PLATE SLIBE:

Fald-down plate slide, Resopat coated multiplex glate. exhaut stone-grey, on operator uninfor-bustomer side. Dimensions (LxV/x) (ic.

HEANIX9 MIKADO-SKS/-SKM 4: 15575x1153 x 30 mm DLANCO MIKADO-SKS/-SKM-3: 1228 x 158 x 90 mm. BLANO9 MIKAD9 SKS/ SKM-2; 860 x 150 x 39 mm

Fold down plate side. Recapul-custod multiplex piete. calaur: pielans, en operator ansl/er custemer side. Primensions (LxYVx) ():

BLANGM MIKARO-SKS/-SKW-4: 1558 x 36 mm BLANCO MIKABO SKS/-SKM-3: 1226 x 152 x 36 mm. BLANGO MIKADO SKS/ SKM 2: 908 x 155 x 30 mm.

#### SIBE SHELF:

Fold-down side short, stamless steel round tube, furthert side Wimensions (LxW):

BLANCIO MIKAIRO-SKS/-SRM-1; 620 x 235; mm, mi má tulea v: 25 mm; BLANCO MIKADIG SK\$4-SKM-3, 823 x 235 mm, round tube 9: 25 mm HLANCO MIKADO-SKS/-SKM 2: 823 x 235 mm, reunchabe #: 25-mm

Fold-down side shalt, Resopel-coaled multiplex ptate; colour, stone-grey, for saint sain

≨imansians (Lx)VxHi:

BLANCO MRKABO-SKS/-SRM-4; 828 x 290 x 38 mm BLANCO MIKADO SKS/ SKM-S 528 x 280 x 30 mm. HLANG@ MIKADO-SKS/-SKM 2: 823 x 280 x 30 mm

Fold-down side shalf, Resopal-coated multiplex place, colour: polaria, for short side.

Dimensions (LyWxH):

BLANCO MIKABO SKS7-SKM-4; 823 x 200 x 30 mm BLANCO MIKADO-SKS/ SKM 3: 623 x 280 x 38 mm

Set of casters, stainless steel, donneter: 195 mm. (fi carstons, 2 of them with larake):

## MAKE:

Manufactures

BLANCO

Model:

Bit ANORE MIKADO-SIC gold buillet ban

with ownlast cooling.

Order No.:


569 838 - MIKADIO SKS 4. 572 126 - MIKABIQ-SKM-4 572 124 MIKAI00-SXS-3 572 127 - MIKABO SKW 3

572 125 - MIKAB®-SKS-2 572-128 MIKARRASKI9-2

## BLANCO MIKADO-UK

## Cold buffet bar with active convection cooling

TECHNICAL DATA	4x1/1
Langth in mm	1542
Width in mor.	675
Height in man	1475 -
Height incl. canopy in mm	2300
Malerial	18/18 stainless steel
Weight in kg	198
Capacity	4 x GN 1/1 200
Refrigerant	R 134a, CFC-free
Coaling system	active convection cooling
Cooling range	+2 °C to +15 °C*
Cooling output	605 W at t <sub>g</sub> =1-1010
Electrical connection	Schuka plug, 230 vett.
Voltage / wattage	230 V / 58 Hz / 0.6 kW
Lighting	Fluorescent tubes (2 x 18 W)
Order Number	589 940
	BI ANDS MIKADS-UKM-1



### DESCRIPTION:

Mobile module with folded, "box type" forceri-air cooling wall with CFC-free insulation. Countertop of 18/16 stainless steel, height of edge: 60 mm, radius at long sides. R=15 mm, short sides lumed down.

The gooling well can be taken out. The evaporation beneath the well can be litted integral for cleaning. In the undertrame of this model, a refrigerating unit, a deficit pan, as well as an electrical connection box are incated. BLANGO MIKARIO with active convection cooling is suitable for food that needs to be kept at temperatures no higher than +7 °C for hygienic reasons.

- Capacity: 4 x GN 1/1, max. 290 mm deep, or up to eight salad bowls, 260 mm in plameter
- · Refrigerant: 8-134a, GFC free
- Operating module on long side including on-off keys for equipment and lights, electronic temperature control with eligital temperature display and automatic defrosting indicator. The temperature is factory pre-set to +7 °C and can be set by values between +2 °C and +15 °C'.
- Ready to plug in, incl. helix sord that can be drawn on, to a length of 2 m. Setuka plug
- 4 heavy-duty synthetic steering casters with staintes steel bearings, 125 mm in diameter; 2 of them with brakes.
- Two stainless steel round tribe stands on either side to support:

   a corred, 6 mm-thick sneeze guard of tempered safety glass that
   provides for optimum hygiene
- The stainless steel lighting shelf is equipped with two fluorescent tubes (2x LBW) to display the dishes in a kiencily light and provide for optimizational presentation.
- Cooling well panelling: 18/10 stainless steel

<sup>\*</sup>This, homographing or measured will the consings well to generating specifie.

## ACESSORIES / OPTIONS:

#### PANELLING:

Stainless steel with a background of coated short metal in: red (PAL 3020), blue (PAL 5003), grizm (PAL 6024), or yollow (PAL 1021)

#### CANOPY-

Textile camppy on stairliess steel supports, removable; colours: red and white, blue and white, green and white, or yellow and white Dimensions (LxW): 1480 x 1250 mm

#### GLASS SHELF:

Glass shalf of tempered safety glass with or without railing (railing of staintess steel round lattic) Dimensions w/o railing (LXVVxH): 1410 x 270 x 8 mm

## LIGHTING SHELF:

Stainless steel lighting shot with 4 integrated low voltage halogen lamps, with 4 x 2000 Dimensions (LxWxXII): 1440 x 80 x 40 mm

#### TRAY SLIDE:

Folid-drawn tray slide, stainless steel round tube, on operator and/or oustomer side.

Dimensions (LxW): 1553 x 235 mm, round tube diameter: 25 mm

Fold-down tray slide, Hesopel-coated multiplex plate, colour: stone-grey, on operator and/or oustomer side Ulmensions (LxW/XxH): 1553 x 280 x 30 mm

Fold-down tray slide, Resopoil nosted multiplex plats, onlour; polaris, on inperator and/ur oustomer side Dimensions (LxVVxxH): 1553 x 280 x 30 mm

## PLATE SLIDE:

Fold-down plate slide, Resupal coeted multiplex plate, colour, stone-gray, on operator and/or austomer side. Dimensions (LxWx1): 1568 x 153 x 30 mm.

Fold down plate slide, Resopel-coaled multiplex plate, colour: polarts, on operator and/or outtomer side. Dimensions (LxW/xH): 1553 x 150 x 38 mm

### SIDE SHELF:

Frist down side short, stainless sleet round tube, for short side. Dimensions (FxW): 623 x 235 mm Hound tube diameter: 25 mm

Fold-down side shelf. Resopol coafed multiplex plate, unlour, stone-groy, for short side Dimercians (LxWxH): 623 x 280 x 30 mm

Fold-down side shelf, Resopel-coated multiplex plate, colour: polaris, for short side.

Dimensions [LxWxH): 928 x 280 x 30 mm.

### CASTORS:

Set of pastors, stainless steel, dismeter: 125 mm (4 casters, 2 of them with brake)

#### MAKE:

Manufacturer: RI ANO®

Model: BLANKE MIKADO-UK cold buffet bar

with autive convection essling

Order No.: 588 949 - MRKADO-UKW-4

## BLANCO MIKADO-W

## Hot buffet bar with bain-marie technology

TECHNICAL DATA	4x1/1	3x1/1	2x1/1
Length in nun	-1542	1217	892
Width in mm	675	575	675
Height in mile	1475	1475	1476
Reight incl. canopy in mm	2800	2300	2300
Material	18/10 stainless steel	18/10 stainless steet	18/10 stainless steel
Weight in kg	IDE	84	63
Capacity	4xGN 1/1-200	3×GN 1/1-200	2xGN 1/1 200
No. of bain marie wells.	4	3	2
Temperature range	+30°C to +95°C	130 °C to 195 °C	180°C to 495°C
Hestrical connection	Schulte plug, 230 velt	Schuko plug, 230 volt	Schuke plug, 230 volt
Voltage / wattage	236V/56Hz/3.33kW	236V/50Hz/2./5kW	230 V / 50 Hz / 1.58 kW
Lighting	Low volltage halegen lamps	Low-voltage halogen lamps	Low-voltage halogen lamps
	(4 x 20 W)	(3 x 20 W)	(2×20 W)
Heating	Ceramic radiators	Ceramic radiators	Ceramic radiators
	(3×150W)	-(2×150W)	(1×150W)
Order Number	•572 129	•572 130	• 572 131
	BLANCO MIKADO WS 4	BLANCO MIKADO WS 3	BLANCO MIKARO-WS-2
	•572 132	•572 133	•572 134
	BLANCO MIKADO WM 4	BLANCO MIKADO WM 3	BLANCO MIKADO-WM-2





### DESCRIPTION:

Mobile module with 4 (or 3 or 2) bein-marie wells, welded in without joints, for GN containers size GN 1/1 200 or their subdivisions. The bain-marie wells are heated indirectly wet or dry, 0.7 kW per well, and are equipped with a drain. Countertop of 18/10 stainless sheet, height of edge: 50 mm, radius at long sides: R = 15 mm, short sides turned down.

- Capacity: 4xGN 171 (or 3 or 2 x ISN 171) with a max, depth of 200 mm
- Operating module in long side including on-off keys for equipment, lights, and infrared lamps, electronic temperature control with digital temperature display. The temperature can be adjusted continuously between <00 °C and <05°C. The wells can be selected, controlled and switched on and off separately.
- Ready to plug in, incl. helix cord dist can be drawn out to a length of 2 m. Schrieb plug.
- 4 heavy-duty synthetic steering castors with steinless steel bearings;
   125 mm in diameter, 2 of them with lookes
- Two stainless steel round-tube stands on either side to support
  a curved, 6 mm thick sneeze guard of tempered safety glass that
  provides for optimum hygiene
- The stainless shell shell for lighting and heating, which is equipped with 4 (or 3 or 2) low-voltage halogen lamps, 20W each, and 3 (or 2 or 1) caramic radiators, 150W each, shows the dishes in a friendly light and provides for optimum food presentation.
- •Panelling: 18/10 stainless steel

### ACESSORIES / OPTIONS:

#### PANELLING:

Strainless steel with a background of coated shoot matel in red (RAL :16649), blue (RAL 5660), green (RAL 6624), or yolkow (RAL 1621)

#### CANSPY:

Textile centrally un plaintess steel supports, removable Cultures rad and white, blue and white, green and white, or yetray and white

idimensions (Ex)44:

BLANCO MIKADO-WS/-WM-4: 1488 x 1250 mm HI ANOD MIKADO WS/ WM-3: 1155 x 1250 mm BLANCO MIKADO-WS/-WM 2: 830 x 1250 mm

#### GLASS SHELF: -

Glass short at tempered salety glass with or without railing (rating of Steinless steel round tube)

Mittensions (Multiling (LxVVxH)

BLANCO MIKADO-WS/-WM-4: 1410 x 270 x 8 min BLANCO MIKADO WSA-WM-3: 1005 x 270 x 8 mm BLANCO MIKADO-WS/-WM 2: 760 x 270 x 8 min

#### HEATING AND LIGHTING SHELF;

Staintess steel lighting shelf with 4 (or 3 or 2) integrated low voltage helogen lamps, 20 W each, and 3 (or 2 or 1) integrated ceramic radiators, 250 W each

Bindensions (Ext/b)Hig

BLANCO MIKADO WSZ-WM-1; 1448 x 114 x 49 mm BLANCO MIKADO-WSZ-WM X: 1115 x 114 x 49 mm BLANCO MIKADO-WSZ-WM-2; 799 x 114 x 49 mm

## TRAY SLIDE:

Fold-dawn Imp shale, stainless skeel mund tube, on operator and/or customer side

Dimensions (ExVi)

PLANGS MIKADO-WS/ WM-4: 1553 x 235 mm, reund tube & 25 mm.

BLANCH MIKADO-WS/-WM 3: 1228 x 235 mm, reund tube © 25 mm

BLANCS MIKADO-WS/-WM-2: 903 x 28 mm, round tube & 25 mm

Fold-riswn tray slide, Resuped coated multiples plate, colour stonegrey, on operator and/or customer side:

Mmanskona (LxW/x1.0:

DLANGO MIKARIP-V/SZ-WM-4: 1558 x 280 x 30 mm BLANCO MIKADO WSZ-WW-3: 1220 x 290 x 30 mm RI ANCO MIKADO-WSZ WW 2: 903 x 280 x 30 mm

Fold-down tray slick: Hesopel-coated multiplex plate, culture polaris, on operator and/or customer side filmensions (Lx Wx Ht:

RI ANCIO MIKADO-WS/ WWI-4: 1553 x 200 x 30 mm BLANCO MIKADO-WS/-WW-3: 1228 x 280 x 30 mm BLANCO MIKADO WS/-WW-2: 803 x 290 x 80 mm

#### PLATE SLIBE:

Fold down plate stide, Resopol confed multiples, plate colour: storm gray, on operator stid/or districted algofumenators (LxWxI I):

BLANCO MIKABO-WS/-WM-4: 1559 X 153 X 30 mm BLANCO MIKABO WS/-WM-3: 1220 X 153 X 30 mm BLANCO MIKADO-WS/-WM 2: 968 X 153 X 30 mm

Hold-down plate sinte, Hestpel-coaled multiplex plate, unifor: polaris, on operator anniver customer side. Dimensions () xWxHy

HI ANCO MIKABO-WS/ WM 4: 1553.X 153 x 30 rbm-BLANCO MIKAMIN-WS/-WM-3: 1224 x 153 x 30 mm; HI ANCO MIKABO WK/ WW-2: 900 x 153 x 36 mm.

#### SIDE SHELF:

Hold-down side shalf, statilless steel pound rules, for short side.

BLANCO MIKABO-WS/-WM-1: 823 x 235 mm, round tube-6: 25 mm, HI ANCO MIKABO-WS/-WM-8: 623 x 235 mm, round tube-6: 25 mp; BLANCO MIKABO-WS/-WM-2: [xxs x 245 mm; round tube-6: 25 mp;

Finiti down side shelf, Rossupat cogget multiplex plans colour: stone grey for short side

Hmensions [Lx9)56.[c.

QL/NCXX MIKADO-WS/-WM 4: 623 x 280 x 30 mm BLANCO MIKADO-WS/-WM-3: 623 x 280 x 30 mm BLANGO MIKADO WS/ WM\*2: 623 x 200 x 30 mm

Fold-down side shalt, Resognationated multiplex plate colour polaris, for shart side

Dimensions (LxWxH): ...

HI ANCO MIKADO WS/-WM-4: 823 x 288 x H0,mm QLANCH MIKADO-WS/-WM N: 623 x 289 x 30 mm BLANCO MIKADO-WS/-WM-2: 823 x 280 x 30 mm

## CASTORIS

Stairtless steel caránt set,

contar diameter: 125 mm (4 castors, 2 of them with brokes)

MAKE

Manufacturer: 0

BLANCO -

Madel:

BLANCO MIKARO W hot buffel bar

with both made technology

Greder Mate

572 129 MIKAND 1994 -572 132 - MIKAND 1994 -572 130 - MIKAND 1995 - 3 572 133 - MIKAND 1994 - 3

5.22 131 - MH6ABG-WG 2

## BLANCO MIKADO-N Ambient buffet bar

TECHNICAL DATA	4x1/1	3x1/1	2×1/1
Length in mm	1542	1217	892
Width in mm	6/5	6/5	6/5
-Height in rum	1018	1018	1018
Height incl. canapy in mm.	2300	2300	2300
Material	18/18 stainless steel	18/10 stainless steel	18/10 stainless steel
Weight in kg	78	57	41
Capacity	corresponds to 4x GN 1/1	corresponds to 3x GN 1/1	corresponds to 2x GN 1/1
Order Number	•572 135	•572 138	•572 137
	BLANGD MIKARO NS 4	BLANGO MIKAIOO NS 3	BLANGOLMIKABOLNS 2
	-572 138	•572 139	+572 140
	BLANDO MIKADO NM 4	BLANCE MIKADO NM 3	BLANGO MIKADO NM 2





## DESCRIPTION:

Moistle module with countertop of 18/10 stainless steel, height of edge: 50 mm, radius at long sides: R = 15 mm, short sides turned down.

- Size: corresponding to 4x CN 1/1 (or 3 or 2 x CN 1/1).
- Control panel on long side including lights on-off switch frucker switch)
- 4 heavy-duty synthetic steering castors with stainless steel bearings.
   125 non-in diameter, 2 of them with brakes.
- Two stainless steel round tube stands on either side, height above countering: 196 num, to accept sanapy and/or sneare guard construction including lighting shelf (if desired)
- Panelling: 18/18 stainless steel.

## ACESSORIES / OPTIONS:

## PANELLING:

Stainless steel with a hackground of coated sheet metal incired (RAL 3020), blue (RAL 5003), gmcn (RAL 8024), or yolkov (RAL 8021) ---

## CANGEY:

Textile carropy on stainless steel supports, removable Colours: rad and white, blue and white, green and white, or yellow and white

Dimensions (LxW):

BLANCO MIKADO NS/ NM 4: 1488 x 1258 mm BLANCO MIKADO-NS/-NM-3: 1155 x 1250 mm BLANCO MIKADO-NS/-NM-2 = 830 x 1250 mm

## SNEEZE GUARD WITH NEON-TUBE LIGHTING SHELF:

two stainless sleet round tube stands on either side support a curved, 6 mm thick sneeze guard of tempered satety gless that provides for optimum hygicine. The stainless steel lighting shell is equipped with two fluorescent tubes: (? x 1844) (modules size 2 x GN1/1 with one tuberscent tube. i.e.  $1 \times 1844$ ) that display the clahes in a triandly light and provide for optimum food presentation.

Directisions (LxWxH):

BLANCO MIKADO NS/-NM-4, 1440 x 80 x 40 mm BHANCO MIKADO-NS/-NM-3; 1115 x 80 x 40 mm BLANCO MIKADO-NS/-NM-2; 790 x 80 x 40 mm

## SNEEZE GUARD WITH HALOGEN LIGHTING SHELF:

Two stainless steel round tube stands on either side support a curved, 6 mm-thick sneeze guard of tempered safety glass that provides for optimum hygiene. The stainless steel lighting shelf, which is equipped with 4 (or 3 or 2) integrated low voltage halogan lamps, 20W each, shows the distress in a triently light and provides for optimum front presentation.

Himensions (LxWxXII):

DLANCO MIKADO NSV-NM-4: 1440 x 80 x 40 mm RI ANGO MIKADO-NSV-NM-R: 1115 x 80 x 40 mm BLANGO MIKADO-NSV-NM-2: 790 x 80 x 40 mm

### GLASS SHELF:

Glass short of tempered safety glass with an without railing (falling of staintess stool round tube)

Jamenstons w/o railing (LxWxxXII):

BLANCO MIKADO NS/ NM-4: 1410 x 270 x 8 mm HÍANOO MIKADO-NS/-NM 3: 1885 x 270 x 8 mm BLANCO MIKADO-NS/-NM-2: 760 x 270 x 8 mm

## TRAY SLIDE:

Folid-down tray olide, stainless steel round into, on operator and/or customer side. Dimensions if xW/s:

BLANCO MIKADO NS/-NM-4: 1553 x 235 mm, mund flubs @ 25 mm BLANCO MIKADO-NS/-NM-3: 1228 x 235 mm, round tube @ 25 mm BLANCO MIKADO-NS/-NM-2: 900 x 235 mm, mund flubs @: 25 mm

Fold down tray slide, Plesupal-content multiples plate, colour: stone grey, an operator and/or customer sate. Dimensions (LxWx) it:

DLANGO MIKARU-NSANM-4: 1558 x 290 x 39 mm HUANGO MIKARU-NSANM-3: 1228 x 290 x 30 mm BLANGO MIKARU-NSANM-2: \$88 x 280 x 30 mm

Fold-down tray stide, Resopol coated multiplex plate, workur: polarts, on operator and/or customor side Dimensions (Lx)/vxXIII:

HLANGO MIKADO-NS/-NM-4: 1558 x 280 x 30 mm BLANGO MIKADO NS/-NM-3: 1228 x 280 x 30 mm HLANGO MIKADO-NS/-NM-2: 908 x 280 x 30 mm

#### PLATE SLIDE:

Fold-down plate stric, Hasopal-goated multipliex plate, online: stone-grey, on operator and/or customer side. Dimensions (LKWxH):

HLANGO MIKABO-NS/ NM 4: 1658 x 153 x 30 mm BLANGO MIKABO-NS/-NM-3: 1220 x 153 x 30 mm BLANGO MIKABO-NS/ NM 2: 908 x 153 x 30 mm

Fold-down plate slide, Resopel-coaled multiplex plate, nelow: polerie, on operator and/or costonier side Burrensians (LwWigX)-():

BLANDO MIKADO NA/ NM-4 1953 x 150 x 30 mm BLANDO MIKADO-NS/-NM-3: 1888 x 153 x 30 mm BLANDO MIKADO NS/-NM-2: 903 x 150 x 30 mm

#### SIDE SHELF

Fold-down side shalf, stainless sleet round tube, for shalf side litmensions (LxVV):

DLANGG MKANIG-NS/-NM-4: \$23 x 235 mm, round tube 6: 25 mm, BLANGG MKADG NS/-NM-3: \$23 x 235 mm, round tube 6: 25 mm BLANGG MKADG-NS/-NM-2: \$23 x 235 mm, round tube 6: 25 mm

Entid-down side shelf, Plesopol coated multiplex plate, colour: stone grey, for short side.

Bimensions (LxWixH):
BI ANDO MIKABO-NSA-NM-4: 628 x 280 x 30 mm.

BLANCO MIKABO-NSA-NM-3: 820 x 280 x 30 mm.

BLANCO MIKABO-NSA-NM-2: 628 x 280 x 30 mm.

Feld-down side shall, Hasopal-coated multiplex plats, calcult poleris, for shart side.

Dimensions (LxWxXH):
HI ANGO MIKADO-NS/ NM 4: 695 x 250 x 30 mm BLANCO MIKADO-NS/-NM-2; 623 x 260 x 30 mm BLANCO MIKADO NS/-NM-2; 620 x 200 x 30 mm

### CASTORS:

Set of castors, staintess staat, diameter: 125 mm (4 castors, 2 of them with brake)

## MAKE:

Manufanturar

**BLAN©**0+

Model:

BLANCO MIKADO N ambient buffel bar

Order No.:

572 135 MIKADO-NS-4 572 138 - MIKADO NM 4

572 139 - MIKADO-NS-3 -572 139 - MIKADO NM-3

572 137 - MIKADO-NS-2. 572 148 - MIKADO-NM-2.