

The bright side of mobile delight.

Optimum food presentation plays a central role in modern catering. Depending on the concept, occasion, time, and place, a mobile food service system has to fulfil a large variety of demands.

By taking our **BLANCO MIKADO** buffet bar and turning it into a **complete food service system** with cooled, heated, and ambient modules, we can meet all of your needs:

MIKADO combines technical perfection to the smallest detail with aesthetic shapes to build a line of highly individual products. **BLANCO MIKADO** modules are especially **flexible** and **mobile**. They **fit in perfectly just about anywhere** and are thus **suitable for almost any kind of use**. The modules are available with a **slim** or **full-size substructure** in 3 different sizes, from 2 x GN 1/1 to 4 x GN 1/1.



innovation

Possible uses of
BLANCO MIKADO:

- hotels
- restaurants
- department store
cafeterias
- staff restaurants
- university cafeterias
and canteens
- rest homes
- hospitals
- motorway service areas
- airport restaurants
- trade fair and party catering

Cold front

The ultimate in cool.



BLANCO MIKADO-SKS-4
with accessories

Potential uses:

- breakfast bar
- dessert bar
- cake bar
- dinner bar
- midnight snack bar
- salad bar
- beverage bar

With **BLANCO MIKADO-SK** and **BLANCO MIKADO-UK**, you can present chilled food in a technically brilliant and optically elegant way. Our model UK with active convection cooling is perfect in every respect.

BLANCO MIKADO-SK — cold buffet bar with contact cooling

- especially **gentle** cooling
- excellent **sanitary** conditions
- **easy and quick cleaning**
- cooling range from +8 °C to +15 °C
(The temperature is measured at the well's geometric centre.)
- cooling well with **sloped bottom** for **optimum draining of water** during defrosting

Module sizes and substructure variations

- 2, 3, and 4 x GN 1/1
- available with a slim or full-size substructure

Cold front

BLANCO MIKADO-UK — cold buffet bar with active convection cooling

- high-performance cooling system with optimum cooling results
- cold air covers the food like a **blanket**, providing for an **even temperature distribution**
- cooling range from +2 °C to +15 °C
(The temperature is measured at the well's geometric centre.)
- optimum cleaning and hygiene through removable cooling well

Module sizes and substructure variations

- 4 x GN 1/1
- full-size substructure



BLANCO MIKADO-UKM-4
with accessories

Heat miracle

Heating things up with perfect technology.

Our hot buffet bar **BLANCO MIKADO-W** is the ideal choice for keeping freshly prepared food warm under optimum conditions.

BLANCO MIKADO-W — hot buffet bar with bain-marie technology

- wells can be **heated** and **controlled separately**
- low energy requirement and quick preheating
- wells can be heated **wet** or **dry**
- **optimum safety** due to **protected ceramic radiators**

Potential uses:

- breakfast bar
- lunch buffet
- dinner bar
- midnight snack bar



BLANCO MIKADO-WS-4
with accessories

Heat miracle



BLANCO MIKADO-WM-4
with accessories



BLANCO MIKADO-WS-2
with accessories

Module sizes and substructure variations

- 2, 3 and 4 x GN 1/1 with 2, 3 or 4 bain-marie wells
- available with a slim or full-size substructure

All-rounder



BLANCO MIKADO-NM-4
with accessories

Brilliantly universal.

Our ambient buffet bar **BLANCO MIKADO-N** optimally complements the cooled and heated buffets. It provides enough space for everything that does not have to be cooled or kept warm.

BLANCO MIKADO-N — ambient buffet bar

- versatile use
- high-quality looks
- sanitary, easy-to-clean surface

Module sizes and substructure variations

- 2, 3, and 4 x GN 1/1
- available with a slim or full-size substructure

Potential uses:

- beverage counter
- coffee or tea bar
- bread or roll counter
- muesli or fruit bar
- storage space for cutlery, glasses, crockery

All-rounder



BLANCO MIKADO-NS-4
with accessories



BLANCO MIKADO-NS-3
with accessories




Basic module
BLANCO MIKADO SKS-4

New faces wherever you look.

In our **BLANCO MIKADO** modules, cool steel and vibrant colours have formed an exciting liaison. Since it offers so many options of combining different colours and designs to create an individual atmosphere, **BLANCO MIKADO** makes eating a true experience.

In this way, **BLANCO MIKADO** integrates itself harmoniously into the design lines of the **BLANCO LAS VEGAS** and **BLANCO MANHATTAN** food servery systems. The **BLANCO MIKADO** modules are available with or without a canopy and can be ordered with various different panellings.

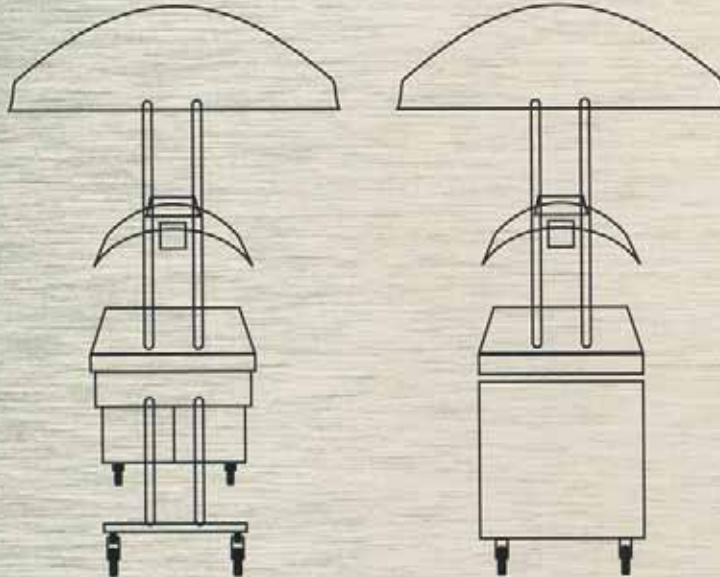

Slim substructure

Full-size substructure

Canopy colours:

- red and white stripes
- blue and white stripes
- green and white stripes
- yellow and white stripes

For the underframe, the following designs are available:

stainless steel (basic version)

stainless steel with squares in:

red / blue / green / yellow

It's the details that count.



· continuously „microlised“ surface for **optimum hygiene** and **elegant looks**

· **fold-down** plate and tray slides and side shelves for **easy manoeuvring** and **maximum flexibility**

· **tray slides** mounted **beneath counter-top** for **optimum hygiene**

· electronic temperature control with **digital indicator** mounted **flush to surface** for **safe operation** and **excellent looks**

· **sneeze guard** and **shelf** of **tempered safety glass** to avoid injuries and provide **optimum safety**

· **countertop** turned **down** in a 15 mm radius on long side for **optimum hygiene** and **ergonomics**

· canopy with **Velcro fasteners** for **quick and easy mounting**



Accessories / options:



- **panelling** of stainless steel with a background of red, blue, green, or yellow
- **textile canopy** in various different designs (red and white, blue and white, green and white, or yellow and white stripes)
- **glass shelf** of safety-glass with or without railing
- **lighting shelf** of stainless steel with low-voltage halogen lamps (for **BLANCO MIKADO** cold and ambient buffet bars)
- **lighting and heating shelf** of stainless steel with 250-watt ceramic radiators (for **BLANCO MIKADO** hot buffet bars)
- fold-down **tray slide** of **stainless steel round tube** or **Resopal** with **stainless steel runners**, colour: stone-grey or polaris, for customer and / or operator side
- fold-down **plate slide** of **Resopal**, colour: stone-grey or polaris, for customer and / or operator side
- fold-down **side shelf** of **stainless steel round tube** or **Resopal**, colour: stone-grey or polaris, for right or left hand short side
- **electric condensation evaporator** (for **BLANCO MIKADO-UK** only)
- stainless steel **castor set**



BLANCO MIKADO

Module sizes



4 x GN 1/1



3 x GN 1/1
(MIKADO-SK only)



2 x GN 1/1
(MIKADO-SK only)


Cold buffet bar



4 x GN 1/1



3 x GN 1/1



2 x GN 1/1

Hot buffet bar



4 x GN 1/1



3 x GN 1/1



2 x GN 1/1


Ambient buffet bar




BLANCO MIKADO-SK

Cold buffet bar with contact cooling

TECHNICAL DATA	4 x 1/1	3 x 1/1	2 x 1/1
Length in mm	1542	1217	892
Width in mm	675	675	675
Height in mm	1475	1475	1475
Height incl. canopy in mm	2300	2300	2300
Material	18/10 stainless steel	18/10 stainless steel	18/10 stainless steel
Weight in kg	106	88	70
Capacity	4 x GN 1/1-150	3 x GN 1/1-150	2 x GN 1/1-150
Refrigerant	R 134a, CFC-free	R 134a, CFC-free	R 134a, CFC-free
Cooling system	contact cooling	contact cooling	contact cooling
Cooling range	+8 °C to +15 °C*	+8 °C to +15 °C*	+8 °C to +15 °C*
Cooling output	243 W at $t_0 = -10$ °C	243 W at $t_0 = -10$ °C	243 W at $t_0 = -10$ °C
Electrical connection	Schuko plug, 230 volt	Schuko plug, 230 volt	Schuko plug, 230 volt
Voltage / wattage	230V / 50Hz / 0.3kW	230V / 50Hz / 0.3kW	230V / 50Hz / 0.3kW
Lighting	Fluorescent tubes (2 x 18W)	Fluorescent tubes (2 x 18W)	Fluorescent tubes (1 x 18W)
Order Number	• 569 939 BLANCO MIKADO-SKS-4 • 572 126 BLANCO MIKADO-SKM-4	• 572 124 BLANCO MIKADO-SKS-3 • 572 127 BLANCO MIKADO-SKM-3	• 572 125 BLANCO MIKADO-SKS-2 • 572 128 BLANCO MIKADO-SKM-2

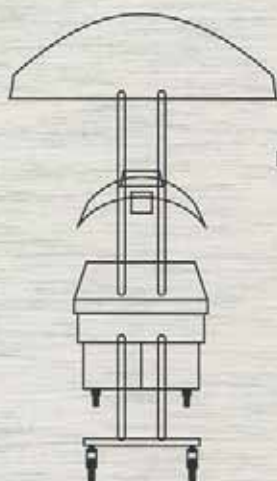

BLANCO MIKADO-SKS

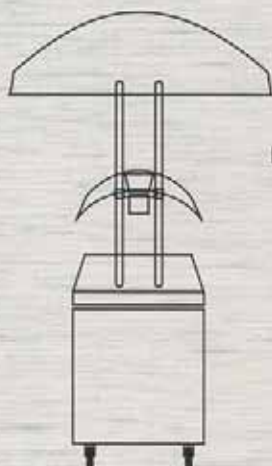

BLANCO MIKADO-SKM

DESCRIPTION:

Mobile module with one-piece cooling well. Well with cooling coils on its outside and CFC-free insulation, foamed, 1/2" ball-valve drain for cleaning or draining water after using crushed ice. Countertop of 18/10 stainless steel, height of edge: 50 mm, radius at long sides: R = 15 mm, short sides turned down.

- Capacity: 4 x GN 1/1 (or: 3 or 2 x GN 1/1) with a max. depth of 150 mm
- Refrigerant: R 134a, CFC-free
- Operating module on long side including on-off keys for equipment and lights, electronic temperature control with digital temperature display. The temperature is factory pre-set to +7 °C and can be set to values between +8 °C and +15 °C*.
- Ready to plug in, incl. helix cord that can be drawn out to a length of 2 m, Schuko plug
- 4 heavy-duty synthetic steering castors with stainless steel bearings, 125 mm in diameter, 2 of them with brakes
- Two stainless steel round-tube stands on either side to support a curved, 6 mm-thick sneeze guard of tempered safety glass that provides for optimum hygiene
- The stainless steel lighting shell is equipped with two fluorescent tubes (2 x 18W) (modules sizes 2 x GN 1/1 only have one fluorescent tube, i.e. 1 x 18W) that display the dishes in a friendly light and provide for optimum food presentation.
- Cooling well panelling: 18/10 stainless steel

* The temperature is measured at the cooling well's geometric centre.

ACCESSORIES / OPTIONS:

PANELLING:

Stainless steel with a background of coated sheet metal in:
red (RAL 3020), blue (RAL 5003),
green (RAL 6024), or yellow (RAL 1021)

CANOPY:

Textile canopy on stainless steel supports, removable
Colours: red and white, blue and white, green and white,
or yellow and white

Dimensions (LxW):

BLANCO MIKADO-SKS/-SKM-4: 1480 x 1250 mm

BLANCO MIKADO-SKS/-SKM-3: 1155 x 1250 mm

BLANCO MIKADO-SKS/-SKM-2: 830 x 1250 mm

GLASS SHELF:

Glass shelf of tempered safety glass with or without railing
(railing of stainless steel round tube)

Dimensions w/o railing (LxWxH):

BLANCO MIKADO-SKS/-SKM-4: 1410 x 270 x 8 mm

BLANCO MIKADO-SKS/-SKM-3: 1085 x 270 x 8 mm

BLANCO MIKADO-SKS/-SKM-2: 760 x 270 x 8 mm

LIGHTING SHELF:

Stainless steel lighting shelf with 4 (or 3 or 2) integrated
low-voltage halogen lamps, 20 watts each

Dimensions (LxWxH):

BLANCO MIKADO-SKS/-SKM-4: 1440 x 80 x 40 mm

BLANCO MIKADO-SKS/-SKM-3: 1115 x 80 x 40 mm

BLANCO MIKADO-SKS/-SKM-2: 790 x 80 x 40 mm

TRAY SLIDE:

Fold-down tray slide, stainless steel round tube, on operator and/or
customer side

Dimensions (LxW):

BLANCO MIKADO-SKS/-SKM-4: 1553 x 235 mm, round tube Ø: 25 mm

BLANCO MIKADO-SKS/-SKM-3: 1228 x 235 mm, round tube Ø: 25 mm

BLANCO MIKADO-SKS/-SKM-2: 903 x 235 mm, round tube Ø: 25 mm

Fold-down tray slide, Resopal-coated multiplex plate,
colour: stone-grey, on operator and/or customer side

Dimensions (LxWxH):

BLANCO MIKADO-SKS/-SKM-4: 1553 x 280 x 30 mm

BLANCO MIKADO-SKS/-SKM-3: 1228 x 280 x 30 mm

BLANCO MIKADO-SKS/-SKM-2: 903 x 280 x 30 mm

Fold-down tray slide, Resopal-coated multiplex plate,
colour: polaris, on operator and/or customer side

Dimensions (LxWxH):

BLANCO MIKADO-SKS/-SKM-4: 1553 x 280 x 30 mm

BLANCO MIKADO-SKS/-SKM-3: 1228 x 280 x 30 mm

BLANCO MIKADO-SKS/-SKM-2: 903 x 280 x 30 mm

PLATE SLIDE:

Fold-down plate slide, Resopal-coated multiplex plate,
colour: stone-grey, on operator and/or customer side

Dimensions (LxWxH):

BLANCO MIKADO-SKS/-SKM-4: 1553 x 153 x 30 mm

BLANCO MIKADO-SKS/-SKM-3: 1228 x 153 x 30 mm

BLANCO MIKADO-SKS/-SKM-2: 903 x 153 x 30 mm

Fold-down plate slide, Resopal-coated multiplex plate,
colour: polaris, on operator and/or customer side

Dimensions (LxWxH):

BLANCO MIKADO-SKS/-SKM-4: 1553 x 153 x 30 mm

BLANCO MIKADO-SKS/-SKM-3: 1228 x 153 x 30 mm

BLANCO MIKADO-SKS/-SKM-2: 903 x 153 x 30 mm

SIDE SHELF:

Fold-down side shelf, stainless steel round tube, for short side

Dimensions (LxW):

BLANCO MIKADO-SKS/-SKM-4: 623 x 235 mm, round tube Ø: 25 mm

BLANCO MIKADO-SKS/-SKM-3: 623 x 235 mm, round tube Ø: 25 mm

BLANCO MIKADO-SKS/-SKM-2: 623 x 235 mm, round tube Ø: 25 mm

Fold-down side shelf, Resopal-coated multiplex plate,
colour: stone-grey, for short side

Dimensions (LxWxH):

BLANCO MIKADO-SKS/-SKM-4: 623 x 280 x 30 mm

BLANCO MIKADO-SKS/-SKM-3: 623 x 280 x 30 mm

BLANCO MIKADO-SKS/-SKM-2: 623 x 280 x 30 mm

Fold-down side shelf, Resopal-coated multiplex plate,
colour: polaris, for short side

Dimensions (LxWxH):

BLANCO MIKADO-SKS/-SKM-4: 623 x 280 x 30 mm

BLANCO MIKADO-SKS/-SKM-3: 623 x 280 x 30 mm

BLANCO MIKADO-SKS/-SKM-2: 623 x 280 x 30 mm

CASTORS:

Set of castors, stainless steel, diameter: 125 mm
(4 castors, 2 of them with brake)

MAKE:

Manufacturer:	BLANCO
Model:	BLANCO MIKADO-SK cold buffet bar with contact cooling
Order No.:	569 939 - MIKADO-SKS-4 572 126 - MIKADO-SKM-4 572 124 - MIKADO-SKS-3 572 127 - MIKADO-SKM-3 572 125 - MIKADO-SKS-2 572 128 - MIKADO-SKM-2

BLANCO MIKADO-UK

Cold buffet bar with active convection cooling


TECHNICAL DATA	4 x 1/1
Length in mm	1542
Width in mm	675
Height in mm	1475
Height incl. canopy in mm	2300
Material	18/10 stainless steel
Weight in kg	190
Capacity	4 x GN 1/1-200
Refrigerant	R 134a, CFC-free
Cooling system	active convection cooling
Cooling range	+2 °C to +15 °C*
Cooling output	605 W at $t_0 = -10$ °C
Electrical connection	Schuko plug, 230 volt
Voltage / wattage	230V/50Hz/0.6 kW
Lighting	Fluorescent tubes (2 x 18W)
Order Number	569 940
	BLANCO MIKADO-UKM-4

DESCRIPTION:

Mobile module with folded, „box-type“ forced-air cooling well with CFC-free insulation. Countertop of 18/10 stainless steel, height of edge: 50 mm, radius at long sides: R = 15 mm, short sides turned down.

The cooling well can be taken out. The evaporator beneath the well can be tilted forward for cleaning. In the underframe of this model, a refrigerating unit, a defrost pan, as well as an electrical connection box are located. BLANCO MIKADO with active convection cooling is suitable for food that needs to be kept at temperatures no higher than +7 °C for hygienic reasons.

- Capacity: 4 x GN 1/1, max. 200 mm deep, or up to eight salad bowls, 260 mm in diameter
- Refrigerant: R 134a, CFC-free
- Operating module on long side including on-off keys for equipment and lights, electronic temperature control with digital temperature display and automatic defrosting indicator. The temperature is factory pre-set to +7 °C and can be set to values between +2 °C and +15 °C*.
- Ready to plug in, incl. helix cord that can be drawn out to a length of 2 m, Schuko plug
- 4 heavy-duty synthetic steering castors with stainless steel bearings, 125 mm in diameter, 2 of them with brakes
- Two stainless steel round-tube stands on either side to support a curved, 6 mm-thick sneeze guard of tempered safety glass that provides for optimum hygiene
- The stainless steel lighting shelf is equipped with two fluorescent tubes (2 x 18W) to display the dishes in a friendly light and provide for optimum food presentation.
- Cooling well panelling: 18/10 stainless steel

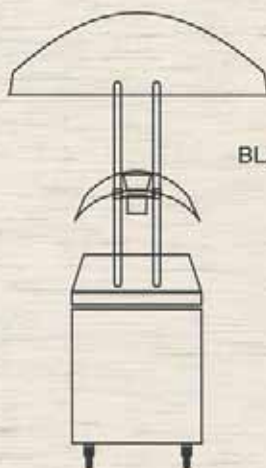

BLANCO MIKADO-UKM

* The temperature is measured at the cooling well's geometric centre.

ACCESSORIES / OPTIONS:

PANELLING:

Stainless steel with a background of coated sheet metal in: red (RAL 3020), blue (RAL 5003), green (RAL 6024), or yellow (RAL 1021)

CANOPY:

Textile canopy on stainless steel supports, removable; colours: red and white, blue and white, green and white, or yellow and white
Dimensions (LxW): 1480 x 1250 mm

GLASS SHELF:

Glass shelf of tempered safety glass with or without railing (railing of stainless steel round tube)
Dimensions w/o railing (LxWxH): 1410 x 270 x 8 mm

LIGHTING SHELF:

Stainless steel lighting shelf with 4 integrated low-voltage halogen lamps, with 4 x 20W
Dimensions (LxWxXH): 1440 x 80 x 40 mm

TRAY SLIDE:

Fold-down tray slide, stainless steel round tube, on operator and/or customer side
Dimensions (LxW): 1553 x 235 mm, round tube diameter: 25 mm

Fold-down tray slide, Resopal-coated multiplex plate, colour: stone-grey, on operator and/or customer side
Dimensions (LxWxH): 1553 x 280 x 30 mm

Fold-down tray slide, Resopal-coated multiplex plate, colour: polaris, on operator and/or customer side
Dimensions (LxWxH): 1553 x 280 x 30 mm

PLATE SLIDE:

Fold-down plate slide, Resopal-coated multiplex plate, colour: stone-grey, on operator and/or customer side
Dimensions (LxWxH): 1553 x 153 x 30 mm

Fold-down plate slide, Resopal-coated multiplex plate, colour: polaris, on operator and/or customer side
Dimensions (LxWxH): 1553 x 153 x 30 mm

SIDE SHELF:

Fold-down side shelf, stainless steel round tube, for short side
Dimensions (LxW): 623 x 235 mm
Round tube diameter: 25 mm

Fold-down side shelf, Resopal-coated multiplex plate, colour: stone-grey, for short side
Dimensions (LxWxH): 623 x 280 x 30 mm

Fold-down side shelf, Resopal-coated multiplex plate, colour: polaris, for short side
Dimensions (LxWxH): 623 x 280 x 30 mm

CASTORS:

Set of castors, stainless steel, diameter: 125 mm
(4 castors, 2 of them with brake)


MAKE:

Manufacturer: BLANCO
Model: BLANCO MIKADO-UK cold buffet bar with active convection cooling
Order No.: 569 940 - MIKADO-UKM-4


BLANCO MIKADO-W

Hot buffet bar with bain-marie technology

TECHNICAL DATA	4 x 1/1	3 x 1/1	2 x 1/1
Length in mm	1542	1217	892
Width in mm	675	675	675
Height in mm	1475	1475	1475
Height incl. canopy in mm	2300	2300	2300
Material	18/10 stainless steel	18/10 stainless steel	18/10 stainless steel
Weight in kg	106	84	63
Capacity	4 x GN 1/1-200	3 x GN 1/1-200	2 x GN 1/1-200
No. of bain-marie wells	4	3	2
Temperature range	+30 °C to +95 °C	+30 °C to +95 °C	+30 °C to +95 °C
Electrical connection	Schuko plug, 230 volt	Schuko plug, 230 volt	Schuko plug, 230 volt
Voltage / wattage	230V/50Hz/3.33kW	230V/50Hz/2.76kW	230V/50Hz/1.59kW
Lighting	Low-voltage halogen lamps (4 x 20 W)	Low-voltage halogen lamps (3 x 20 W)	Low-voltage halogen lamps (2 x 20 W)
Heating	Ceramic radiators (3 x 150 W)	Ceramic radiators (2 x 150 W)	Ceramic radiators (1 x 150 W)
Order Number	•572 129 BLANCO MIKADO-WS-4 •572 132 BLANCO MIKADO-WM-4	•572 130 BLANCO MIKADO-WS-3 •572 133 BLANCO MIKADO-WM-3	•572 131 BLANCO MIKADO-WS-2 •572 134 BLANCO MIKADO-WM-2

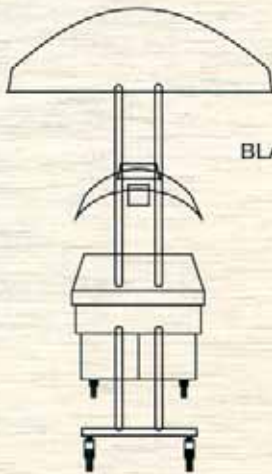

BLANCO MIKADO-WS

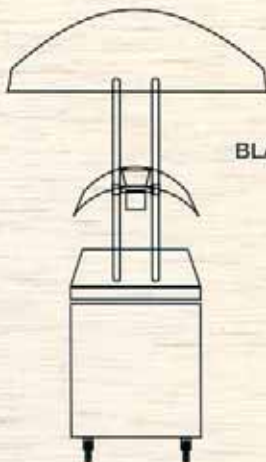

BLANCO MIKADO-WM

DESCRIPTION:

Mobile module with 4 (or 3 or 2) bain-marie wells, welded in without joints, for GN containers size GN 1/1-200 or their subdivisions. The bain-marie wells are heated indirectly wet or dry, 0.7 kW per well, and are equipped with a drain. Countertop of 18/10 stainless steel, height of edge: 50 mm, radius at long sides: R = 15 mm, short sides turned down.

- Capacity: 4xGN 1/1 (or 3 or 2 x GN 1/1) with a max. depth of 200 mm
- Operating module on long side including on-off keys for equipment, lights, and infrared lamps, electronic temperature control with digital temperature display. The temperature can be adjusted continuously between +30 °C and +95 °C. The wells can be selected, controlled and switched on and off separately.
- Ready to plug in, incl. helix cord that can be drawn out to a length of 2 m, Schuko plug
- 4 heavy-duty synthetic steering castors with stainless steel bearings, 125 mm in diameter, 2 of them with brakes
- Two stainless steel round-tube stands on either side to support a curved, 6 mm-thick sneeze guard of tempered safety glass that provides for optimum hygiene
- The stainless steel shelf for lighting and heating, which is equipped with 4 (or 3 or 2) low-voltage halogen lamps, 20W each, and 3 (or 2 or 1) ceramic radiators, 150W each, shows the dishes in a friendly light and provides for optimum food presentation.
- Panelling: 18/10 stainless steel

ACCESSORIES / OPTIONS:

PANELLING:

Stainless steel with a background of coated sheet metal in: red (RAL 3020), blue (RAL 5003), green (RAL 6024), or yellow (RAL 1021)

CANOPY:

Textile canopy on stainless steel supports, removable
Colours: red and white, blue and white, green and white, or yellow and white

Dimensions (L x W):

BLANCO MIKADO-WS/-WM-4: 1480 x 1250 mm

BLANCO MIKADO-WS/-WM-3: 1155 x 1250 mm

BLANCO MIKADO-WS/-WM-2: 830 x 1250 mm

GLASS SHELF:

Glass shelf of tempered safety glass with or without railing (railing of stainless steel round tube)

Dimensions w/o railing (LxWxH):

BLANCO MIKADO-WS/-WM-4: 1410 x 270 x 8 mm

BLANCO MIKADO-WS/-WM-3: 1085 x 270 x 8 mm

BLANCO MIKADO-WS/-WM-2: 760 x 270 x 8 mm

HEATING AND LIGHTING SHELF:

Stainless steel lighting shelf with 4 (or 3 or 2) integrated low-voltage halogen lamps, 20W each, and 3 (or 2 or 1) integrated ceramic radiators, 250W each

Dimensions (LxWxH):

BLANCO MIKADO-WS/-WM-4: 1440 x 114 x 40 mm

BLANCO MIKADO-WS/-WM-3: 1115 x 114 x 40 mm

BLANCO MIKADO-WS/-WM-2: 790 x 114 x 40 mm

TRAY SLIDE:

Fold-down tray slide; stainless steel round tube, on operator and/or customer side

Dimensions (L x W):

BLANCO MIKADO-WS/-WM-4: 1553 x 235 mm, round tube Ø: 25 mm

BLANCO MIKADO-WS/-WM-3: 1228 x 235 mm, round tube Ø: 25 mm

BLANCO MIKADO-WS/-WM-2: 903 x 235 mm, round tube Ø: 25 mm

Fold-down tray slide, Resopal-coated multiplex plate, colour: stone-grey, on operator and/or customer side

Dimensions (L x W x H):

BLANCO MIKADO-WS/-WM-4: 1553 x 280 x 30 mm

BLANCO MIKADO-WS/-WM-3: 1228 x 280 x 30 mm

BLANCO MIKADO-WS/-WM-2: 903 x 280 x 30 mm

Fold-down tray slide, Resopal-coated multiplex plate, colour: polaris, on operator and/or customer side

Dimensions (L x W x H):

BLANCO MIKADO-WS/-WM-4: 1553 x 280 x 30 mm

BLANCO MIKADO-WS/-WM-3: 1228 x 280 x 30 mm

BLANCO MIKADO-WS/-WM-2: 903 x 280 x 30 mm

PLATE SLIDE:

Fold-down plate slide, Resopal-coated multiplex plate, colour: stone-grey, on operator and/or customer side

Dimensions (LxWxH):

BLANCO MIKADO-WS/-WM-4: 1553 x 153 x 30 mm

BLANCO MIKADO-WS/-WM-3: 1228 x 153 x 30 mm

BLANCO MIKADO-WS/-WM-2: 903 x 153 x 30 mm

Fold-down plate slide, Resopal-coated multiplex plate, colour: polaris, on operator and/or customer side

Dimensions (LxWxH):

BLANCO MIKADO-WS/-WM-4: 1553 x 153 x 30 mm

BLANCO MIKADO-WS/-WM-3: 1228 x 153 x 30 mm

BLANCO MIKADO-WS/-WM-2: 903 x 153 x 30 mm

SIDE SHELF:

Fold-down side shelf, stainless steel round tube, for short side

Dimensions (LxW):

BLANCO MIKADO-WS/-WM-4: 623 x 235 mm, round tube Ø: 25 mm

BLANCO MIKADO-WS/-WM-3: 623 x 235 mm, round tube Ø: 25 mm

BLANCO MIKADO-WS/-WM-2: 623 x 235 mm, round tube Ø: 25 mm

Fold-down side shelf, Resopal-coated multiplex plate, colour: stone-grey, for short side

Dimensions (LxWxH):

BLANCO MIKADO-WS/-WM-4: 623 x 280 x 30 mm

BLANCO MIKADO-WS/-WM-3: 623 x 280 x 30 mm

BLANCO MIKADO-WS/-WM-2: 623 x 280 x 30 mm

Fold-down side shelf, Resopal-coated multiplex plate, colour: polaris, for short side

Dimensions (LxWxH):

BLANCO MIKADO-WS/-WM-4: 623 x 280 x 30 mm

BLANCO MIKADO-WS/-WM-3: 623 x 280 x 30 mm

BLANCO MIKADO-WS/-WM-2: 623 x 280 x 30 mm

CASTORS:

Stainless steel castor set,

castor diameter: 125 mm (4 castors, 2 of them with brakes)

MAKE:

Manufacturer: BLANCO

Model: BLANCO MIKADO-W hot buffet bar with bain-marie technology

Order No.: 572 129 - MIKADO-WS-4

572 132 - MIKADO-WM-4

572 130 - MIKADO-WS-3


572 133 - MIKADO-WM-3

572 131 - MIKADO-WS-2

572 134 - MIKADO-WM-2

BLANCO MIKADO-N Ambient buffet bar

TECHNICAL DATA	4 x 1/1	3 x 1/1	2 x 1/1
Length in mm	1542	1217	892
Width in mm	675	675	675
Height in mm	1018	1018	1018
Height incl. canopy in mm	2300	2300	2300
Material	18/10 stainless steel	18/10 stainless steel	18/10 stainless steel
Weight in kg	73	57	41
Capacity	corresponds to 4x GN 1/1	corresponds to 3x GN 1/1	corresponds to 2x GN 1/1
Order Number	• 572 135 BLANCO MIKADO-NS-4 • 572 138 BLANCO MIKADO-NM-4	• 572 136 BLANCO MIKADO-NS-3 • 572 139 BLANCO MIKADO-NM-3	• 572 137 BLANCO MIKADO-NS-2 • 572 140 BLANCO MIKADO-NM-2

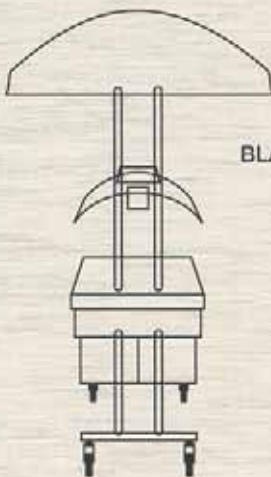


BLANCO MIKADO-NS

DESCRIPTION:

Mobile module with countertop of 18/10 stainless steel, height of edge: 50 mm, radius at long sides: R = 15 mm, short sides turned down.

- Size: corresponding to 4x GN 1/1 (or 3 or 2 x GN 1/1)
- Control panel on long side including lights on-off switch (rocker switch)
- 4 heavy-duty synthetic steering castors with stainless steel bearings, 125 mm in diameter, 2 of them with brakes
- Two stainless steel round tube stands on either side, height above countertop: 100 mm, to accept canopy and/or sneeze guard construction including lighting shelf (if desired)
- Panelling: 18/10 stainless steel

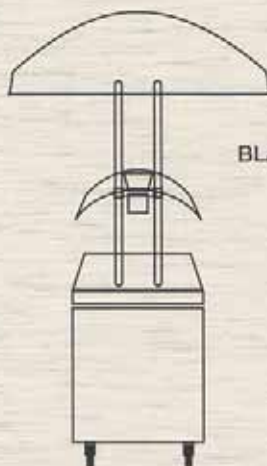

BLANCO MIKADO-NM

ACCESSORIES / OPTIONS:

PANELLING:

Stainless steel with a background of coated sheet metal in: red (RAL 3020), blue (RAL 5003), green (RAL 6024), or yellow (RAL 1021)

CANOPY:

Textile canopy on stainless steel supports, removable
Colours: red and white, blue and white, green and white, or yellow and white

Dimensions (L x W):

BLANCO MIKADO-NS/-NM-4: 1480 x 1250 mm

BLANCO MIKADO-NS/-NM-3: 1155 x 1250 mm

BLANCO MIKADO-NS/-NM-2: 830 x 1250 mm

SNEEZE GUARD WITH NEON-TUBE LIGHTING SHELF:

Two stainless steel round-tube stands on either side support a curved, 6 mm-thick sneeze guard of tempered safety glass that provides for optimum hygiene. The stainless steel lighting shelf is equipped with two fluorescent tubes (2 x 18W) (modules size 2 x GN1/1 - only one fluorescent tube, i.e. 1 x 18W) that display the dishes in a friendly light and provide for optimum food presentation.

Dimensions (LxWxH):

BLANCO MIKADO-NS/-NM-4: 1440 x 80 x 40 mm

BLANCO MIKADO-NS/-NM-3: 1115 x 80 x 40 mm

BLANCO MIKADO-NS/-NM-2: 790 x 80 x 40 mm

SNEEZE GUARD WITH HALOGEN LIGHTING SHELF:

Two stainless steel round-tube stands on either side support a curved, 6 mm-thick sneeze guard of tempered safety glass that provides for optimum hygiene. The stainless steel lighting shelf, which is equipped with 4 (or 3 or 2) integrated low-voltage halogen lamps, 20W each, shows the dishes in a friendly light and provides for optimum food presentation.

Dimensions (LxWxXH):

BLANCO MIKADO-NS/-NM-4: 1440 x 80 x 40 mm

BLANCO MIKADO-NS/-NM-3: 1115 x 80 x 40 mm

BLANCO MIKADO-NS/-NM-2: 790 x 80 x 40 mm

GLASS SHELF:

Glass shelf of tempered safety glass with or without railing (railing of stainless steel round tube)

Dimensions w/o railing (LxWxXH):

BLANCO MIKADO-NS/-NM-4: 1410 x 270 x 8 mm

BLANCO MIKADO-NS/-NM-3: 1085 x 270 x 8 mm

BLANCO MIKADO-NS/-NM-2: 760 x 270 x 8 mm

TRAY SLIDE:

Fold-down tray slide, stainless steel round tube, on operator and/or customer side

Dimensions (LxW):

BLANCO MIKADO-NS/-NM-4: 1553 x 235 mm, round tube Ø: 25 mm

BLANCO MIKADO-NS/-NM-3: 1228 x 235 mm, round tube Ø: 25 mm

BLANCO MIKADO-NS/-NM-2: 903 x 235 mm, round tube Ø: 25 mm

Fold-down tray slide, Resopal-coated multiplex plate, colour: stone-grey, on operator and/or customer side

Dimensions (LxWxH):

BLANCO MIKADO-NS/-NM-4: 1553 x 280 x 30 mm

BLANCO MIKADO-NS/-NM-3: 1228 x 280 x 30 mm

BLANCO MIKADO-NS/-NM-2: 903 x 280 x 30 mm

Fold-down tray slide, Resopal-coated multiplex plate, colour: polaris, on operator and/or customer side

Dimensions (LxWxXH):

BLANCO MIKADO-NS/-NM-4: 1553 x 280 x 30 mm

BLANCO MIKADO-NS/-NM-3: 1228 x 280 x 30 mm

BLANCO MIKADO-NS/-NM-2: 903 x 280 x 30 mm

PLATE SLIDE:

Fold-down plate slide, Resopal-coated multiplex plate, colour: stone-grey, on operator and/or customer side

Dimensions (LxWxH):

BLANCO MIKADO-NS/-NM-4: 1553 x 153 x 30 mm

BLANCO MIKADO-NS/-NM-3: 1228 x 153 x 30 mm

BLANCO MIKADO-NS/-NM-2: 903 x 153 x 30 mm

Fold-down plate slide, Resopal-coated multiplex plate, colour: polaris, on operator and/or customer side

Dimensions (LxWxXH):

BLANCO MIKADO-NS/-NM-4: 1553 x 153 x 30 mm

BLANCO MIKADO-NS/-NM-3: 1228 x 153 x 30 mm

BLANCO MIKADO-NS/-NM-2: 903 x 153 x 30 mm

SIDE SHELF:

Fold-down side shelf, stainless steel round tube, for short side

Dimensions (LxW):

BLANCO MIKADO-NS/-NM-4: 623 x 235 mm, round tube Ø: 25 mm

BLANCO MIKADO-NS/-NM-3: 623 x 235 mm, round tube Ø: 25 mm

BLANCO MIKADO-NS/-NM-2: 623 x 235 mm, round tube Ø: 25 mm

Fold-down side shelf, Resopal-coated multiplex plate, colour: stone-grey, for short side

Dimensions (LxWxH):

BLANCO MIKADO-NS/-NM-4: 623 x 280 x 30 mm

BLANCO MIKADO-NS/-NM-3: 623 x 280 x 30 mm

BLANCO MIKADO-NS/-NM-2: 623 x 280 x 30 mm

Fold-down side shelf, Resopal-coated multiplex plate, colour: polaris, for short side

Dimensions (LxWxXH):

BLANCO MIKADO-NS/-NM-4: 623 x 280 x 30 mm

BLANCO MIKADO-NS/-NM-3: 623 x 280 x 30 mm

BLANCO MIKADO-NS/-NM-2: 623 x 280 x 30 mm

CASTORS:

Set of castors, stainless steel, diameter: 125 mm (4 castors, 2 of them with brake)

MAKE:

Manufacturer:

BLANCO

Model:

BLANCO MIKADO-N
ambient buffet bar

Order No.:

572 135 - MIKADO-NS-4
572 138 - MIKADO-NM-4
572 136 - MIKADO-NS-3
572 139 - MIKADO-NM-3
572 137 - MIKADO-NS-2
572 140 - MIKADO-NM-2



isselbaecher
FOOD · SERVICE · EQUIPMENT GMBH

Schlagweg 12 · 35687 Dillenburg - Niederscheld · Telefon: 02771/2656-0 · e-Mail: info@issel.com